

CHAPTER 8

Network capability and performance

- 8.1 Introduction
- 8.2 Available generation capacity
- 8.3 Network control facilities
- 8.4 Existing network configuration
- 8.5 Transfer capability
- 8.6 Grid section performance
- 8.7 Zone performance

8 Network capability and performance

Key highlights

- Generation commitments since the 2020 Transmission Annual Planning Report (TAPR) add 470MW to Queensland's semi-scheduled variable renewable energy (VRE) generation capacity taking the total existing and committed semi-scheduled VRE generation capacity to 4,444MW.
- Storage commitments since the 2020 TAPR include the 250MW 8 hour Kidston Pumped Hydro Energy Storage (PHES) and 100MW 1.5 hour Wandoan South Battery Energy Storage System (BESS).
- Record peak transmission delivered demands were recorded in the Wide Bay and Surat zones during 2020/21.
- Record minimum transmission delivered demands and transmission delivered annual energy were recorded in the majority of zones during 2020/21.
- The transmission network has performed reliably during 2020/21, with Queensland grid sections largely unconstrained.

8.1 Introduction

This chapter on network capability and performance provides:

- an outline of existing and committed generation capacity over the next three years
- a summary of network control facilities configured to disconnect load as a consequence of non-credible events
- single line diagrams of the existing high voltage (HV) network configuration
- background on factors that influence network capability
- zonal energy transfers for the two most recent years
- historical constraint times and power flow duration curves at key sections of Powerlink Queensland's transmission network
- a qualitative explanation of factors affecting power transfer capability at key sections of Powerlink's transmission network
- historical system normal constraint times and load duration curves at key zones of Powerlink's transmission network
- a summary of the management of high voltages associated with light load conditions
- double circuit transmission lines categorised as vulnerable by the Australian Energy Market Operator (AEMO).

The capability of Powerlink's transmission network to meet forecast demand is dependent on a number of factors. Queensland's transmission network is predominantly utilised more during summer than winter. During higher summer temperatures, reactive power requirements are greater and transmission plant has lower power carrying capability. Also, higher demands occur in summer as shown in Figure 3.10.


The location and pattern of generation dispatch influences power flows across most of the Queensland network. Future generation dispatch patterns and interconnector flows are uncertain in the deregulated electricity market and will vary substantially due to output of VRE generation and due to the effect of planned or unplanned outages of generation plant. Power flows can also vary substantially with planned or unplanned outages of transmission network elements. Power flows may also be higher at times of local area or zone maximum demands (refer to Table 3.17) and/or when embedded generation output is lower.

8.2 Available generation capacity

Scheduled generation in Queensland is predominantly a combination of coal-fired, gas turbine and hydro-electric generators.

AEMO's definition of 'committed' from the System Strength Impact Assessment Guidelines¹ (effective 1 July 2018) has been adopted for the purposes of this year's TAPR. During 2020/21, commitments have added 470MW of semi-scheduled VRE capacity, taking Queensland's semi-scheduled VRE generation capacity to 4,444MW. Figure 8.1 illustrates the expected changes to available and committed generation capacity in Queensland from summer 2017/18 to summer 2023/24.

Figure 8.1 Summer available generation capacity by energy source

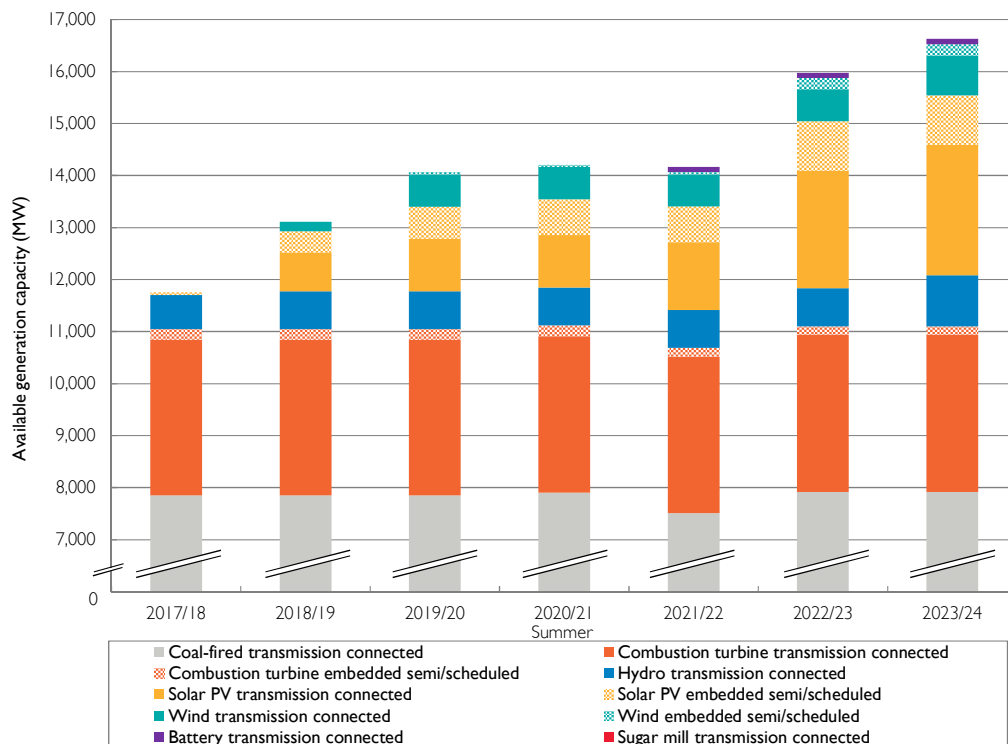

8.2.1 Existing and committed transmission connected and direct connect embedded generation

Table 8.1 summarises the available generation capacity of power stations connected, or committed to be connected to Powerlink's transmission network (including the non-scheduled generators at Yarwun, Invicta and Koombooloomba) or to Powerlink's direct connect customers.

Scheduled transmission connected Genex PHES and Wandoan South BESS have reached committed status since the 2020 TAPR.

Semi-scheduled transmission connected Edenvale Solar Farm and Kaban Wind Farm have reached committed status since the 2020 TAPR. A replacement of Sun Metals solar farm's inverters sees its capacity increase by 14MW since the 2020 TAPR.

Information in this table has been provided to AEMO by the owners of the generators. Details of registration and generator capacities can be found on AEMO's [website](#). In accordance with Clause 5.18A of the National Electricity Rules (NER), Powerlink's Register of Large Generator Connections with information on generators connected to Powerlink's network can be found on Powerlink's [website](#).

¹ AEMO, [System Strength Impact Assessment Guidelines](#), June 2018.

8 Network capability and performance

Table 8.1 Available generation capacity – existing and committed generators connected to the Powerlink transmission network or direct connect customers

Generator	Location	Available generation capacity (MW) (1)					
		Summer 2021/22	Winter 2022	Summer 2022/23	Winter 2023	Summer 2023/24	Winter 2024
Coal-fired							
Stanwell	Stanwell	1,460	1,460	1,460	1,460	1,460	1,460
Gladstone	Calliope River	1,680	1,680	1,680	1,680	1,680	1,680
Callide B	Calvale	700	700	700	700	700	700
Callide Power Plant	Calvale	434	886	854	886	854	886
Tarong North	Tarong	443	443	443	443	443	443
Tarong	Tarong	1,400	1,400	1,400	1,400	1,400	1,400
Kogan Creek	Kogan Creek PS	720	720	710	750	710	750
Millmerran	Millmerran PS	672	852	672	852	672	852
Total coal-fired		7,509	8,141	7,919	8,171	7,919	8,171
Combustion turbine							
Townsville 132kV	Townsville PS	150	165	150	165	150	165
Mt Stuart	Townsville South	387	400	387	400	387	400
Yarwun (2)	Yarwun	160	155	160	155	160	155
Condamine (3)	Columboola	139	144	139	144	139	144
Braemar 1	Braemar	491	543	501	543	501	543
Braemar 2	Braemar	480	519	480	519	480	519
Darling Downs	Braemar	563	630	563	630	563	630
Oakey (4)	Tangkam	288	346	288	346	288	346
Swanbank E	Swanbank E PS	350	365	350	365	350	365
Total combustion turbine		3,008	3,267	3,018	3,267	3,018	3,267
Hydro-electric							
Barron Gorge	Kamerunga	66	66	66	66	66	66
Kareeya (including Koomboolomba) (5)	Chalumbin	93	93	93	93	93	93
Wivenhoe (6)	Mt. England	570	570	570	570	570	570
Kidston Pumped Hydro Storage	Kidston					250	250
Total hydro-electric		729	729	729	729	979	979
Solar PV (7)							
Ross River	Ross	116	116	116	116	116	116
Sun Metals (3)	Townsville Zinc	121	121	121	121	121	121
Houghton	Houghton River	100	100	100	100	100	100

Table 8.1 Available generation capacity – existing and committed generators connected to the Powerlink transmission network or direct connect customers (*continued*)

Generator	Location	Available generation capacity (MW) (1)					
		Summer 2021/22	Winter 2022	Summer 2022/23	Winter 2023	Summer 2023/24	Winter 2024
Clare	Clare South	100	100	100	100	100	100
Whitsunday	Strathmore	57	57	57	57	57	57
Hamilton	Strathmore	57	57	57	57	57	57
Daydream	Strathmore	150	150	150	150	150	150
Hayman	Strathmore	50	50	50	50	50	50
Rugby Run	Moranbah	65	65	65	65	65	65
Lilyvale	Lilyvale	100	100	100	100	100	100
Moura	Moura		82	82	82	82	82
Rodds Bay	South of Wurdong				250	250	250
Woolooga Energy Park	Woolooga		176	176	176	176	176
Bluegrass	Chinchilla		148	148	148	148	148
Columboola	Columboola	162	162	162	162	162	162
Gangarri	Wandoan South	120	120	120	120	120	120
Edenvale Solar Park	Orana			146	146	146	146
Western Downs Green Power Hub	Western Downs		400	400	400	400	400
Darling Downs	Braemar	108	108	108	108	108	108
Total solar PV		1,306	2,112	2,258	2,508	2,508	2,508
Wind (7)							
Mt Emerald	Walkamin	180	180	180	180	180	180
Kaban	Tumoulin				151	151	151
Coopers Gap	Coopers Gap	440	440	440	440	440	440
Total wind		620	620	620	771	771	771
Battery (7)							
Wandoan South 1.5h BESS	Wandoan South	100	100	100	100	100	100
Total battery		100	100	100	100	100	100
Sugar mill							
Invicta (5)	Invicta Mill	0	34	0	34	0	34
Total sugar mill		0	34	0	34	0	34
Total all stations		13,271	14,054	14,371	15,123	14,631	15,123

8 Network capability and performance

Notes:

- (1) Synchronous generator capacities shown are at the generator terminals and are therefore greater than power station net sent out nominal capacity due to station auxiliary loads and step-up transformer losses. The capacities are nominal as the generator rating depends on ambient conditions. Some additional overload capacity is available at some power stations depending on ambient conditions.
- (2) Yarwun is a non-scheduled generator, but is required to comply with some of the obligations of a scheduled generator.
- (3) Condamine and Sun Metals are direct connected embedded generators.
- (4) Oakey Power Station is an open-cycle, dual-fuel, gas-fired power station. The generated capacity quoted is based on gas fuel operation.
- (5) Koombaloo and Invicta are transmission connected non-scheduled generators.
- (6) Wivenhoe Power Station is shown at full capacity (570MW). However, output can be limited depending on water storage levels in the dam.
- (7) VRE generators and battery are shown at maximum capacity at the point of connection.

8.2.2 Existing and committed scheduled and semi-scheduled distribution connected embedded generation

Table 8.2 summarises the available generation capacity of embedded scheduled and semi-scheduled power stations connected, or committed to be connected to Queensland's distribution network.

Scheduled embedded Mackay GT was decommissioned since the 2020 TAPR.

Semi-scheduled embedded Dulacca Wind Farm has reached committed status since the 2020 TAPR.

Information in this table has been provided to AEMO by the owners of the generators. Details of registration and generator capacities can be found on AEMO's [website](#).

Table 8.2 Available generation capacity – existing and committed scheduled or semi-scheduled generators connected to the Ergon Energy and Energex (part of the Energy Queensland Group) distribution networks.

Generator	Location	Available generation capacity (MW)					
		Summer 2021/22	Winter 2022	Summer 2022/23	Winter 2023	Summer 2023/24	Winter 2024
Combustion turbine (1)							
Townsville 66kV	Townsville PS	78	82	78	82	78	82
Barcaldine	Barcaldine	34	37	34	37	34	37
Roma	Roma	54	68	54	68	54	68
Total combustion turbine		166	187	166	187	166	187
Solar PV (2)							
Kidston	Kidston	50	50	50	50	50	50
Kennedy Energy Park	Hughenden	15	15	15	15	15	15
Collinsville	Collinsville North	42	42	42	42	42	42
Clermont	Clermont	75	75	75	75	75	75
Middlemount	Lilyvale	26	26	26	26	26	26
Emerald	Emerald	72	72	72	72	72	72
Aramara	Aramara			104	104	104	104
Susan River	Maryborough	75	75	75	75	75	75
Childers	Isis	56	56	56	56	56	56
Munna Creek	Kilkivan			120	120	120	120
Kingaroy	Kingaroy			40	40	40	40
Maryrorough	Yarranlea	27	27	27	27	27	27
Yarranlea	Yarranlea	103	103	103	103	103	103
Oakey 1	Oakey	25	25	25	25	25	25
Oakey 2	Oakey	55	55	55	55	55	55
Warwick	Warwick	64	64	64	64	64	64
Total solar PV		685	685	949	949	949	949
Wind (2)							
Kennedy Energy Park	Hughenden	43	43	43	43	43	43
Dulacca	Roma			173	173	173	173
Total wind		43	43	216	216	216	216
Total all stations		894	915	1,331	1,352	1,331	1,352

Notes:

- (1) Synchronous generator capacities shown are at the generator terminals and are therefore greater than power station net sent out nominal capacity due to station auxiliary loads and step-up transformer losses. The capacities are nominal as the generator rating depends on ambient conditions. Some additional overload capacity is available at some power stations depending on ambient conditions.
- (2) VRE generators shown at maximum capacity at the point of connection.

8 Network capability and performance

8.3 Network control facilities

Powerlink participated in the second Power System Frequency Risk Review² (PSFRR) in 2020. The PSFRR, as part of the Emergency Frequency Control Schemes (EFCS) rule change³, placed an obligation on AEMO to undertake, in collaboration with Transmission Network Service Providers (TNSPs), an integrated, periodic review of power system frequency risks associated with non-credible contingency events.

AEMO published the Final 2020 PSFRR – Stage 2 Report on 22 December 2020. For Queensland, the recommendation involved the expansion of Powerlink's CQ-SQ Special Protection Scheme (SPS). The conventional SPS disconnects one or two highest generating Callide units, depending on CQ-SQ transfer, for the unplanned loss of both Calvale to Halys 275kV feeders. The likely success of this scheme was limited to transfers lower than 1,700MW and relied on the ability to disconnect high output Callide units. Powerlink has enhanced the scheme with a new Wide Area Monitoring Protection and Control (WAMPAC) architecture to operate in parallel with the existing SPS. The WAMPAC scheme was first armed in July 2021. The WAMPAC scheme avails approximately 600MW of northern VRE generation and up to 700MW⁴ of southern loads to be tripped along with the existing SPS. Whilst this scheme reduces the exposure to CQ-SQ separation for this non-credible event, it does not cover the full operational spectrum of the CQ-SQ grid section flow. Powerlink is in the process of designing a second tranche of the scheme to further reduce the exposure. The commissioning of the second tranche will also see the decommissioning of the conventional scheme.

The Stage 2 Report also considered the non-credible loss of the double-circuit Queensland – New South Wales Interconnector (QNI). The assessment reviewed the effectiveness of the existing under-frequency load shedding (UFLS) scheme (for QNI northerly transfer) and the potential need to implement an over-frequency generator shedding (OFGS) scheme (for QNI southerly transfer) to contain the respective maximum frequency deviations to within the frequency operating standard (FOS) limits.

The studies of the non-credible loss of QNI while on a southerly limit did not identify an immediate need to implement an OFGS scheme in Queensland to cater for QNI contingencies, if the semi-scheduled inverter-based renewable (IBR) generators provide primary frequency response (PFR) consistent with the NER requirement.

The studies of the non-credible loss of QNI while on a northerly limit indicate that the existing UFLS controls are able to manage the frequency disturbance when exporting at the secure transfer limit. However, this requires significant levels of UFLS. The ongoing effectiveness of UFLS in Queensland should be reassessed as part of the 2022 PSFRR with specific consideration given to whether declaration of a protected event is warranted to manage the risk associated with the non-credible loss of QNI while transferring power into Queensland. This may be necessary if planned measures to address the declining UFLS effectiveness are unsuccessful. Declaration of a protected event under conditions with low levels of UFLS available in Queensland and high transfers into Queensland across QNI would enable a number of options to manage the risk posed by the non-credible loss of QNI, including specifying a local requirement for frequency raise FCAS in Queensland or constraining northerly transfers across QNI.

Stage 2 of the 2020 PSFRR references the Frequency Control Work Plan⁵ that reviews Under Frequency Load Shedding (UFLS) schemes NEM-wide.

Powerlink owns other network control facilities which minimise or reduce the consequences of multiple contingency events. Network control facilities owned by Powerlink which may disconnect load following a multiple non-credible contingency event are listed in Table 8.3.

² AEMO, [2020 PSFRR – Stage 2 – Final Report](#), December 2020.

³ AEMC, [Rule Determination National Electricity Amendment \(Emergency Frequency Control Schemes\) Rule 2017](#), March 2017.

⁴ Includes both 250MW Wivenhoe Power Station units (if operating in pumping mode).

⁵ AEMO, [Frequency Control Work Plan](#), September 2020.

Table 8.3 Powerlink owned network control facilities configured to disconnect load as a consequence of non-credible events during system normal conditions

Scheme	Purpose
FNQ Under Voltage Load Shed (UVLS) scheme	Minimise risk of voltage collapse in FNQ
North Goonyella Under Frequency Load Shed (UFLS) relay	Raise system frequency
Dysart UVLS	Minimise risk of voltage collapse in Dysart area
Eagle Downs UVLS	Minimise risk of voltage collapse in Eagle Downs area
Boyne Island UFLS relay	Raise system frequency
Queensland UFLS inhibit scheme	Minimise risk of QNI separation for an UFLS event for moderate to high southern transfers on QNI compared to Queensland demand
CQSQ N-2 Wide Area Monitoring Protection and Control (WAMPAC) scheme	Minimise risk of CQSQ separation for a non-credible loss of the Calvale to Halys 275kV double circuit transmission line
Tarong UFLS relay	Raise system frequency
Middle Ridge UFLS relays	Raise system frequency
Mudgeeraba Emergency Control Scheme (ECS)	Minimise risk of voltage collapse in the Gold Coast zone

8.4 Existing network configuration

Figures 8.2, 8.3, 8.4 and 8.5 illustrate Powerlink's system intact network as of July 2021.

8 Network capability and performance

Figure 8.2 Existing HV network July 2021 – North Queensland


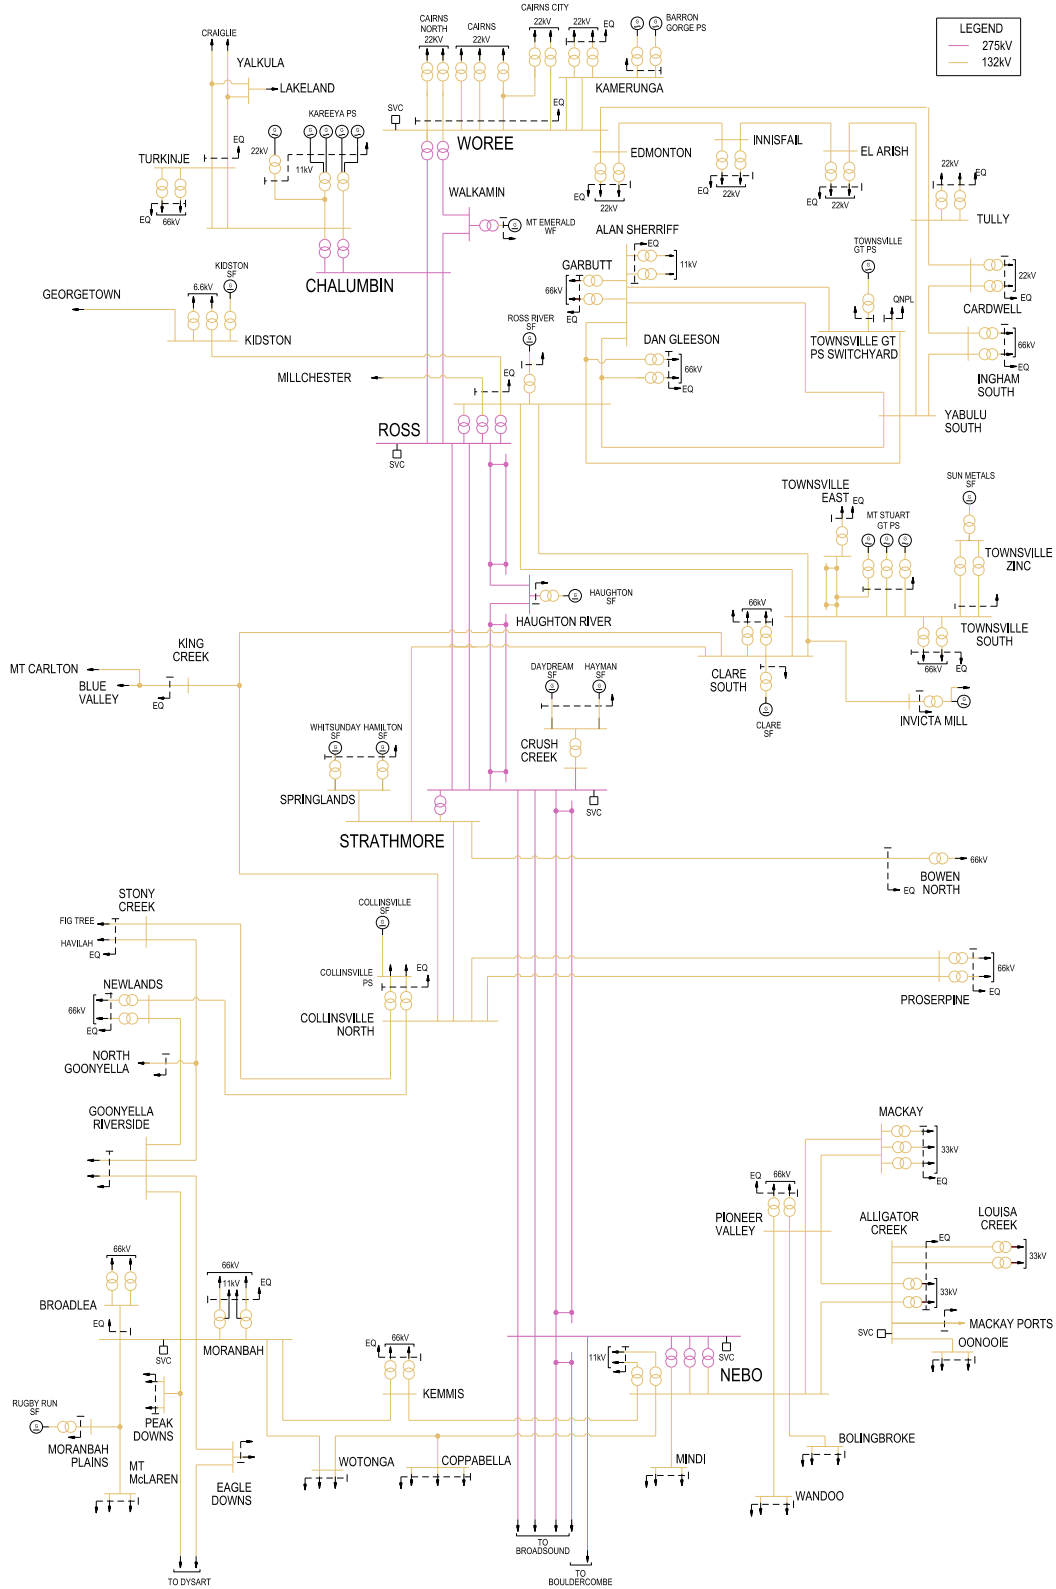


Figure 8.3 Existing HV network July 2021 – Central Queensland

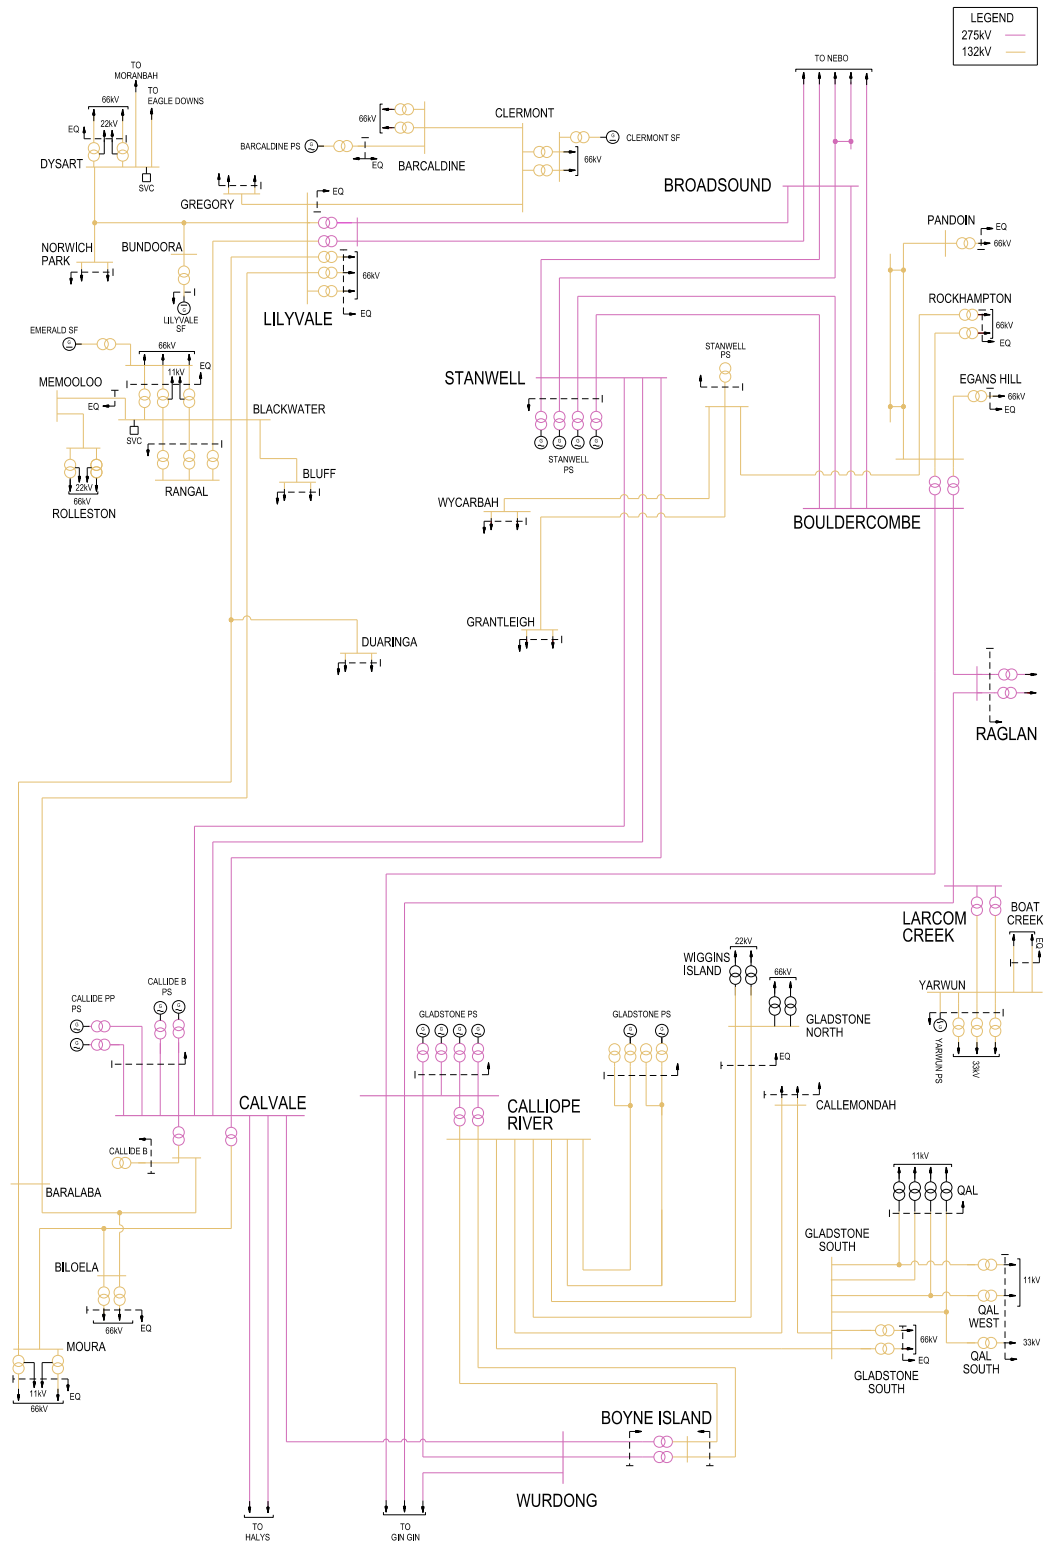

8 Network capability and performance

Figure 8.4 Existing HV network July 2021 - South West Queensland


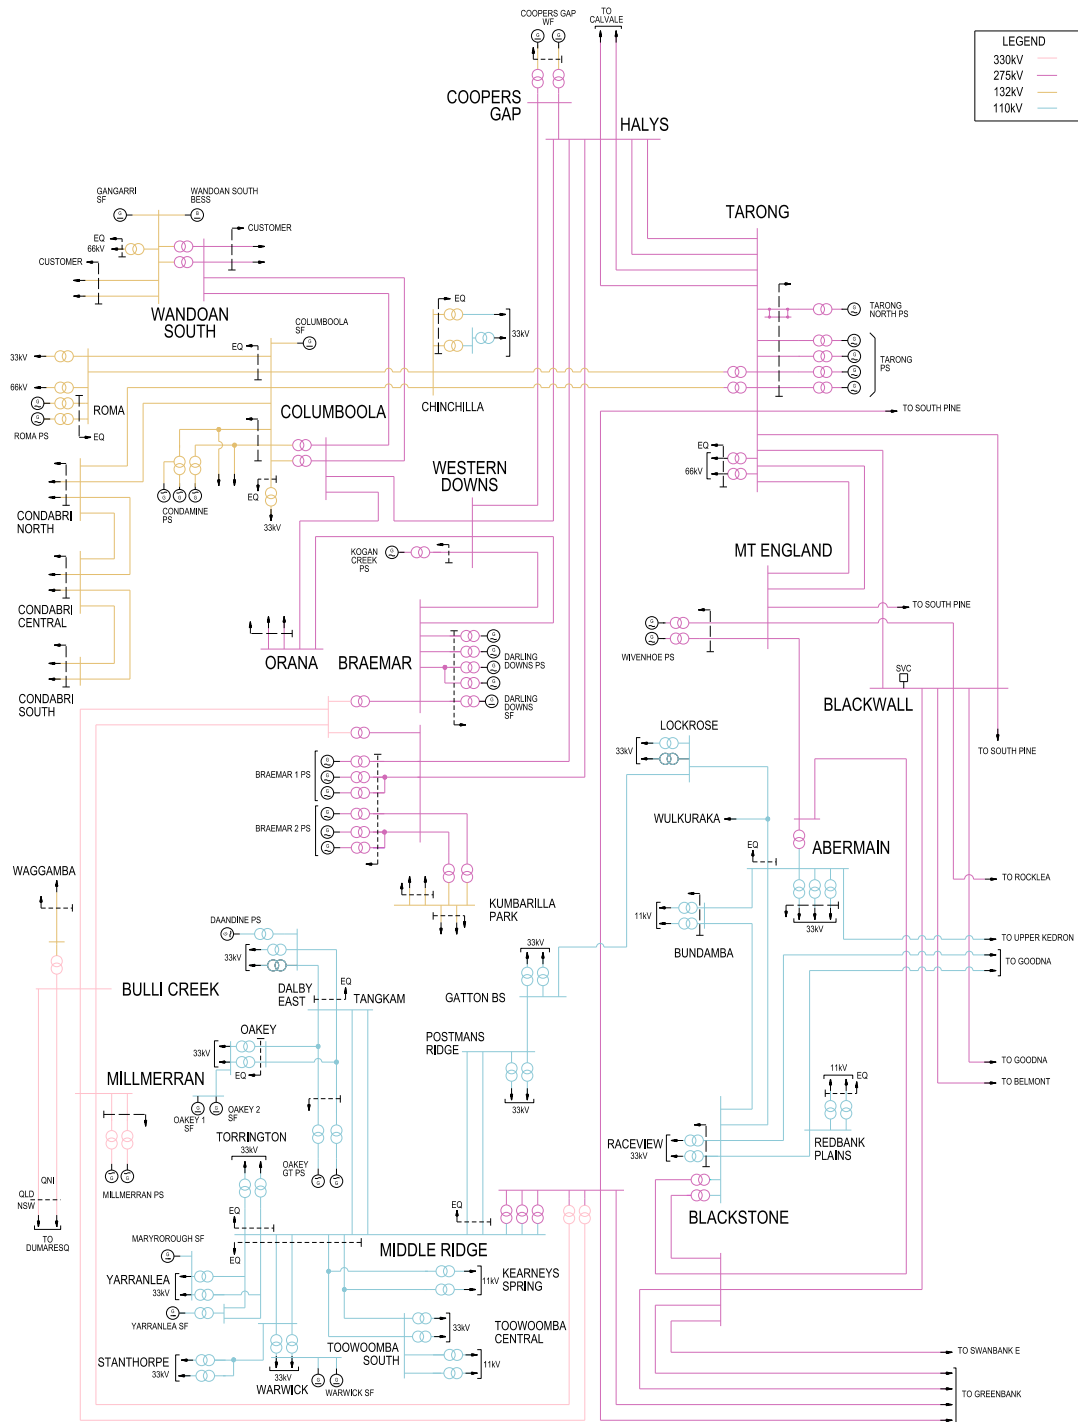


Figure 8.5 Existing HV network July 2021 - South East Queensland

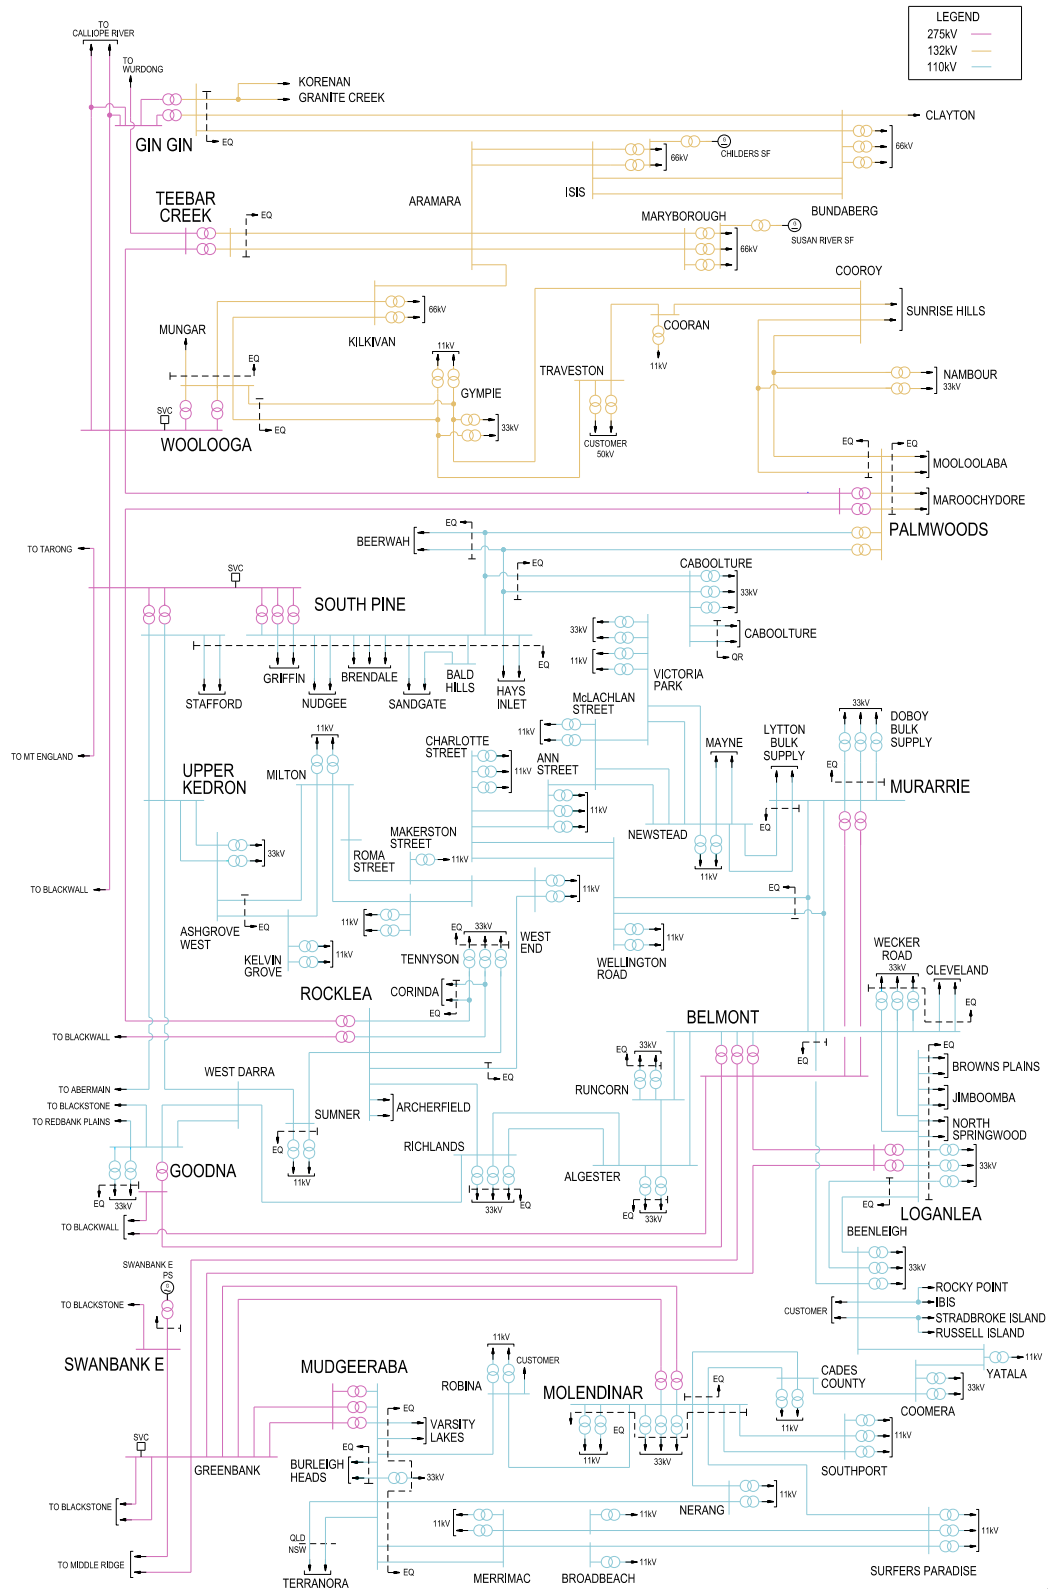

8 Network capability and performance

8.5 Transfer capability

8.5.1 Location of grid sections

Powerlink has identified a number of grid sections that allow network capability and forecast limitations to be assessed in a structured manner. Limit equations have been derived for these grid sections to quantify maximum secure power transfer. Maximum power transfer capability may be set by transient stability, voltage stability, thermal plant ratings or protection relay load limits. AEMO has incorporated these limit equations into constraint equations within the National Electricity Market Dispatch Engine (NEMDE). Table C.2 provides definitions and Figure C.2 in Appendix C shows the location of relevant grid sections on the Queensland network.

8.5.2 Determining transfer capability

Transfer capability across each grid section varies with different system operating conditions. Transfer limits in the National Electricity Market (NEM) are not generally amenable to definition by a single number. Instead, TNSPs define the capability of their network using multi-term equations. These equations quantify the relationship between system operating conditions and transfer capability, and are implemented into NEMDE, following AEMO's due diligence, for optimal dispatch of generation. In Queensland the transfer capability is highly dependent on which generators are in service and their dispatch level. The limit equations maximise transmission capability available to electricity market participants under prevailing system conditions.

Limit equations derived by Powerlink which are current at the time of publication of this TAPR are provided in Appendix D. Limit equations will change over time with demand, generation and network development, and/or network reconfiguration. For example, AEMO and Powerlink are currently investigating an update to dynamic load models which include aggregate representation of rooftop photovoltaic (PV) systems. Such detailed and extensive analysis on limit equations has not been carried out for future network and generation developments for this TAPR. However, expected limit improvements for committed works are incorporated in all future planning. Section 8.6 provides a qualitative description of the main system conditions that affect the capability of each grid section.

8.6 Grid section performance


This section is a qualitative summary of system conditions with major effects on transfer capability across key grid sections of the Queensland network.

For each grid section, the time that the relevant constraint equations have bound over the last 10 years is provided categorised as occurring during intact or outage conditions based on AEMO's constraint description. Constraint times can be associated with a combination of generator unavailability, network outages, unfavourable dispatches and/or high loads. Constraint times do not include occurrences of binding constraints associated with network support agreements. Binding constraints whilst network support is dispatched are not classed as congestion. Although high constraint times may not be indicative of the cost of market impact, they serve as a trigger for the analysis of the economics for overcoming the congestion.

Binding constraint information is sourced from AEMO. Historical binding constraint information is not intended to imply a prediction of constraints in the future.

Historical transfer duration curves for the last five years are included for each grid section. Grid section transfers are predominantly affected by load, generation and transfers to neighbouring zones. Figures 8.6 and 8.7 provide 2019/20 and 2020/21 zonal energy as generated into the transmission network (refer to Figure C.1 in Appendix C for generators included in each zone) and by major embedded generators, transmission delivered energy to Distribution Network Service Providers (DNSPs) and direct connect customers and grid section energy transfers. Figure 8.8 provides the changes in energy transfers from 2019/20 to 2020/21. These figures assist in the explanation of differences between 2019/20 and 2020/21 grid section transfer duration curves.

Figure 8.6 2019/20 zonal electrical energy transfers (GWh)

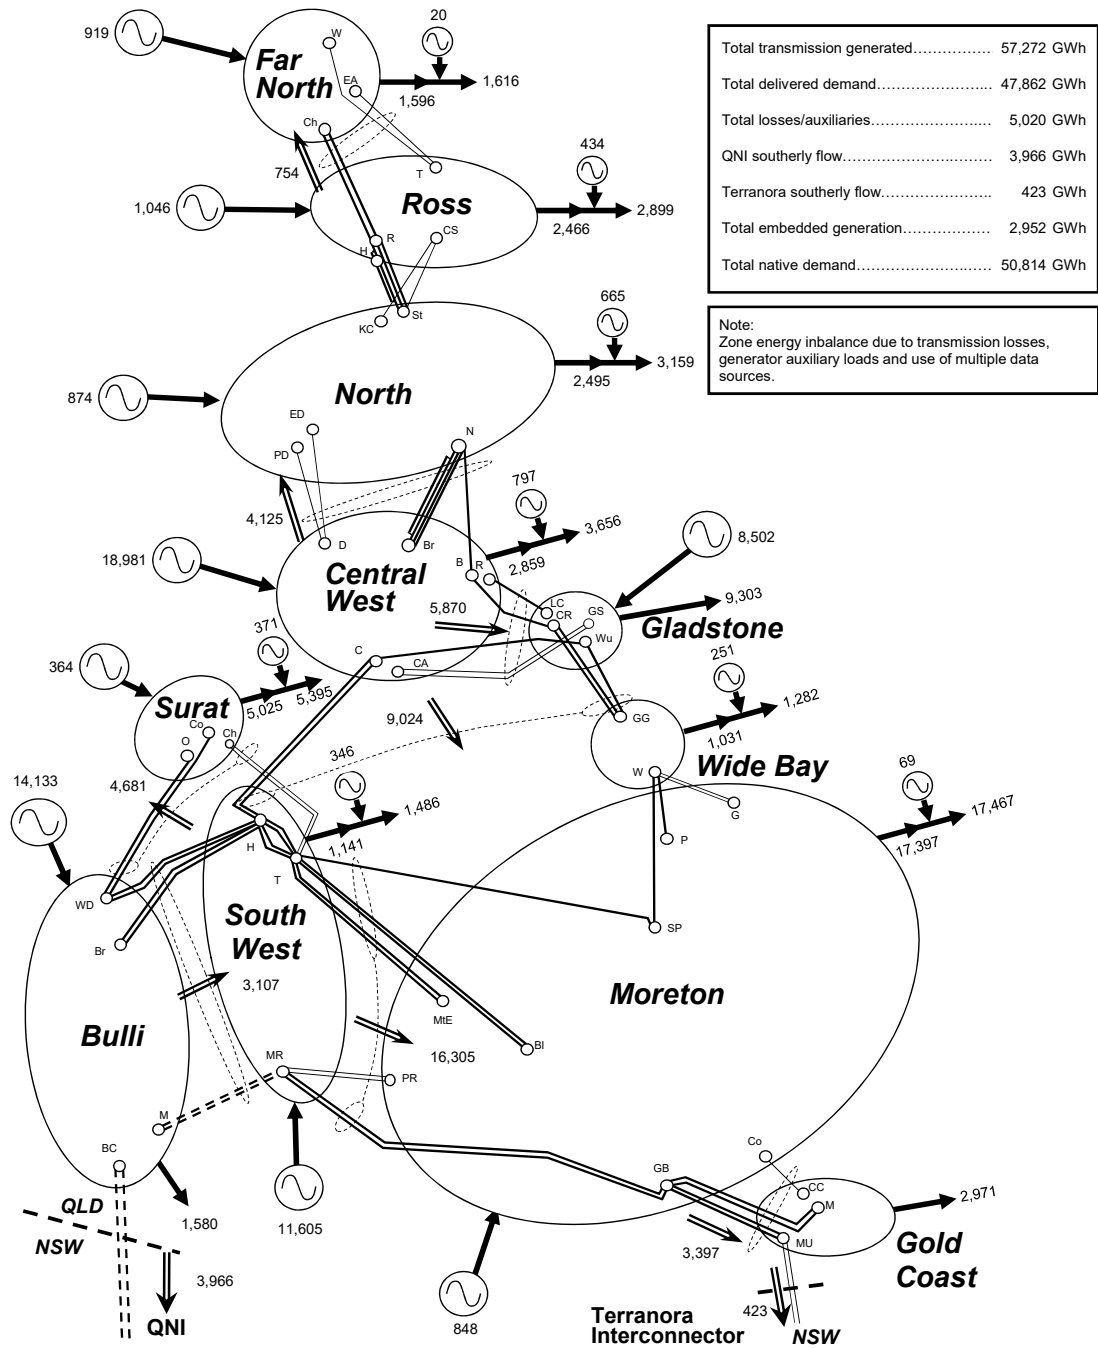

8 Network capability and performance

Figure 8.7 2020/21 zonal electrical energy transfers (GWh)


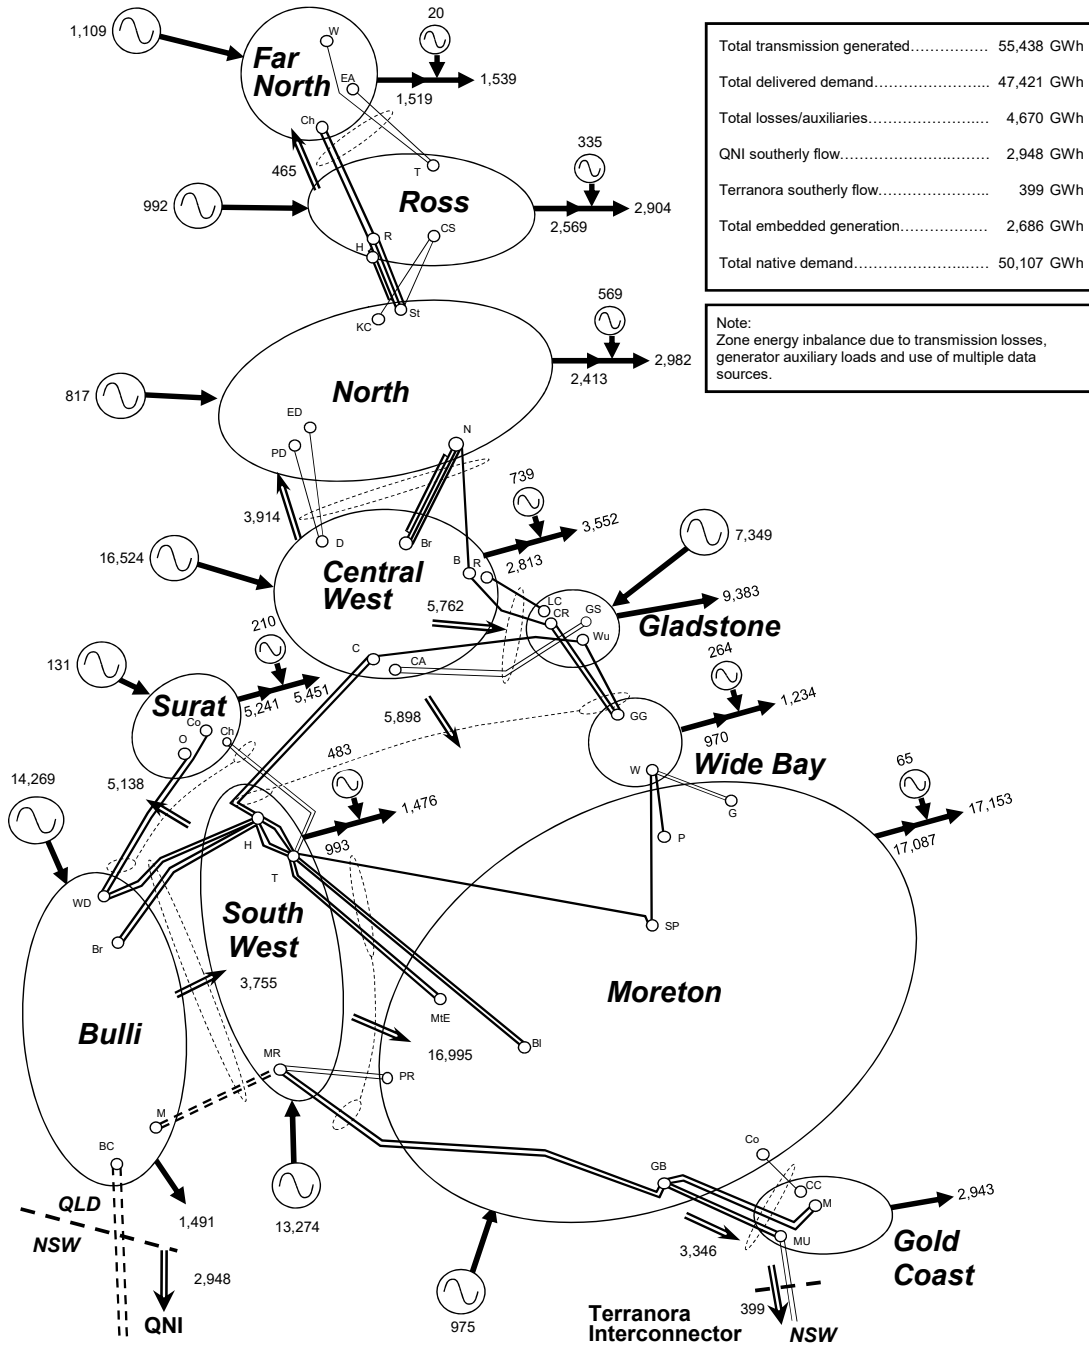


Figure 8.8 Change in zonal electrical energy transfers (GWh)

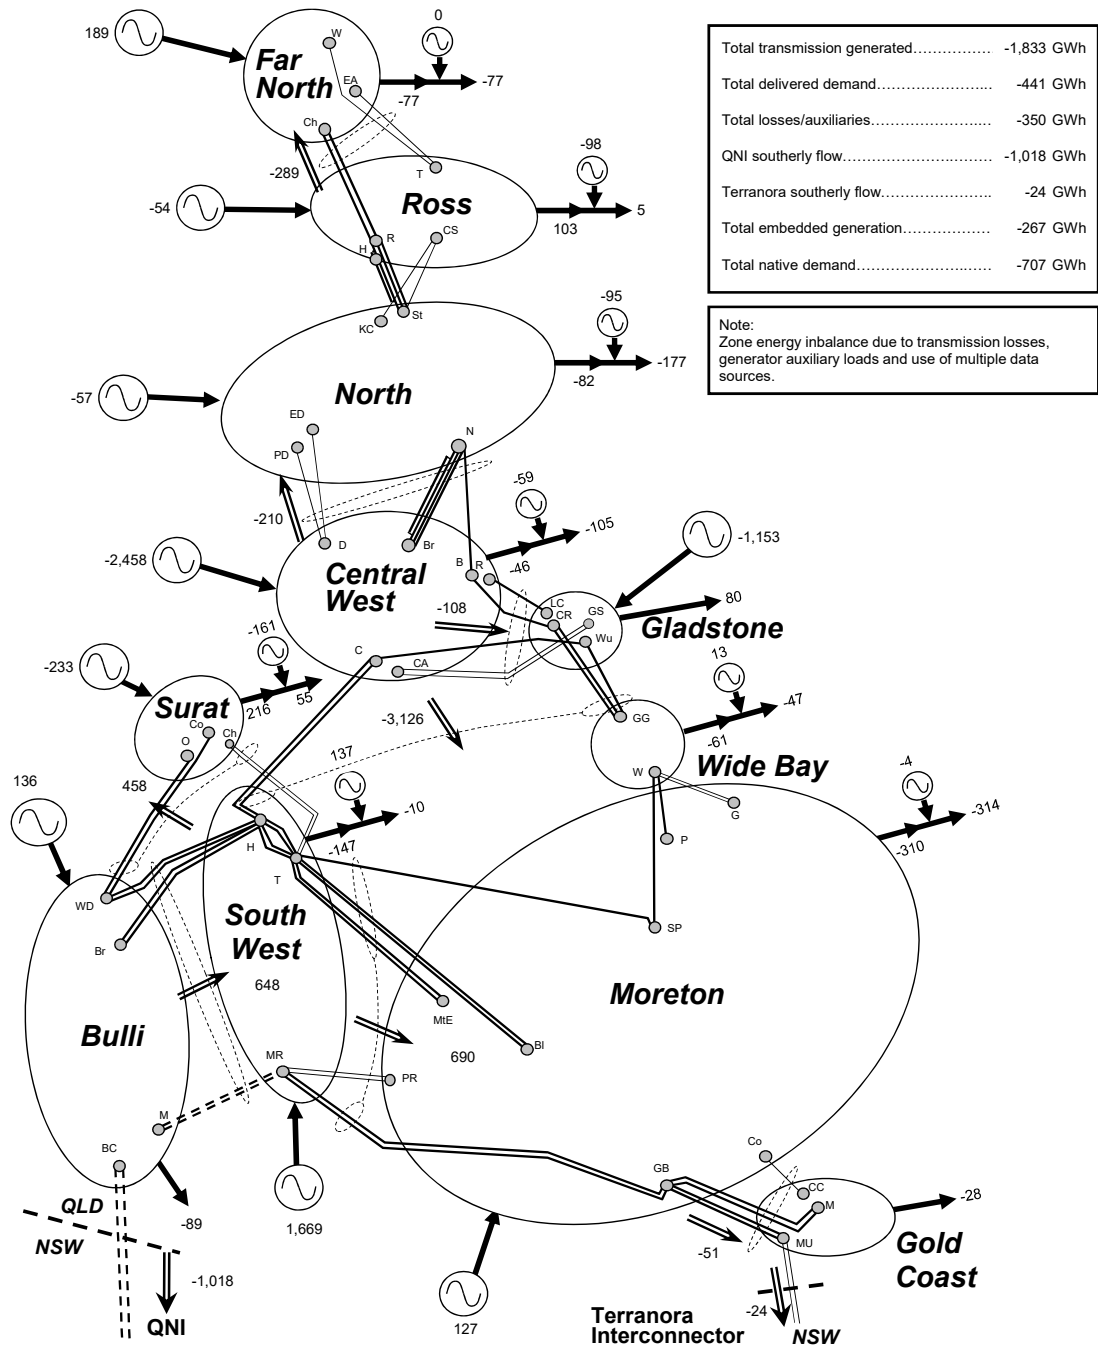

8 Network capability and performance

8.6.1 Far North Queensland (FNQ) grid section

Maximum power transfer across the FNQ grid section is set by voltage stability associated with an outage of a Ross to Chalumbin 275kV circuit or the interim Ross to Woree 275kV circuit⁶.

The limit equation in Table D.1 of Appendix D shows that the following variables have a significant effect on transfer capability:

- Far North and Ross zones generation
- Far North zone shunt compensation levels.

Local hydro and wind generation reduces transfer capability but allows more demand to be securely supported in the Far North zone. This is because reactive margins increase with additional local generation, allowing further load to be delivered before reaching minimum allowable reactive margins. However, due to its distributed and reactive nature, increases in delivered demand erode reactive margins at greater rates than they were created by the additional local generation. Limiting power transfers are thereby lower with the increased local generation but a greater load can be delivered.

The FNQ grid section did not constrain operation during 2020/21. Information pertaining to the historical duration of constrained operation for the FNQ grid section is summarised in Figure 8.9.

Figure 8.9 Historical FNQ grid section constraint times


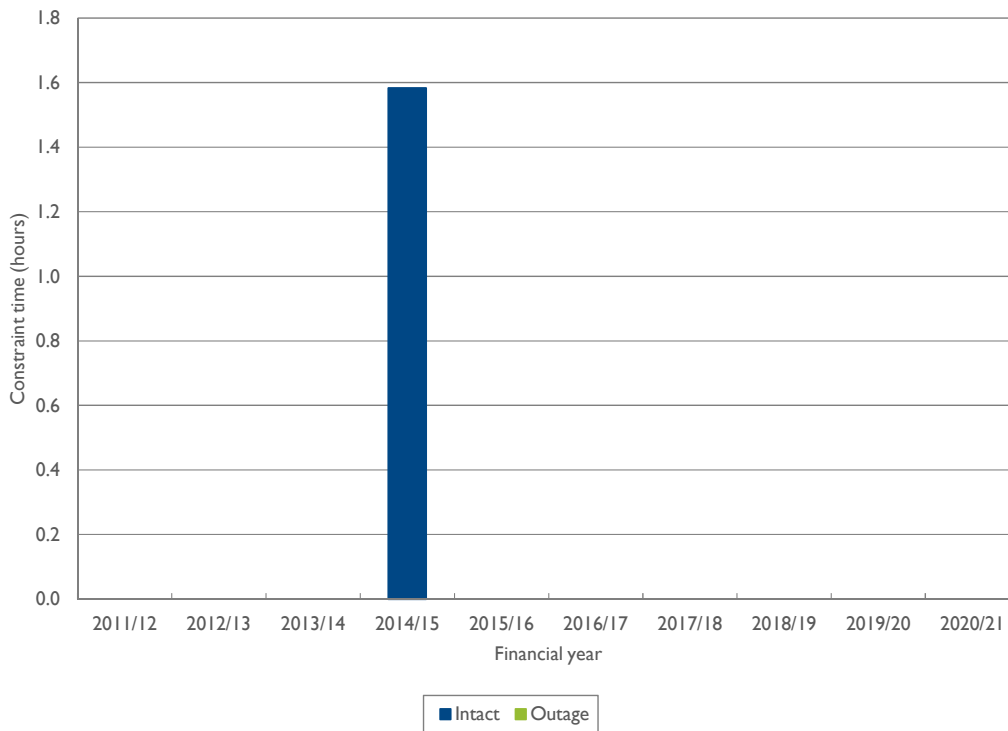


Figure 8.10 provides historical transfer duration curves showing a large decrease in energy transfer but similar peak transfers over 2020/21. This is predominantly attributed to the recent commissioning of Mount Emerald Wind Farm located between Chalumbin and Woree substations. Historically, changes in peak flow and energy delivered to the Far North zone by the transmission network have been dependant on the Far North zone load and generation from the hydro generating power stations at Barron Gorge and Kareeya. These vary depending on rainfall levels in the Far North zone. The combined hydro generating power station capacity factor has increased between 2019/20 and 2020/21 further lowering northerly energy transfers (refer to figures 8.6, 8.7 and 8.8).

⁶ In November 2020, Powerlink reconfigured the FNQ grid section to maximise reliability to Cairns during rectification works at Bayview Heights overhead to underground transition station on a Chalumbin to Woree 275kV circuit. This reconfiguration required new limit equations listed in Table D.1 of Appendix D.

Figure 8.10 Historical FNQ grid section transfer duration curves

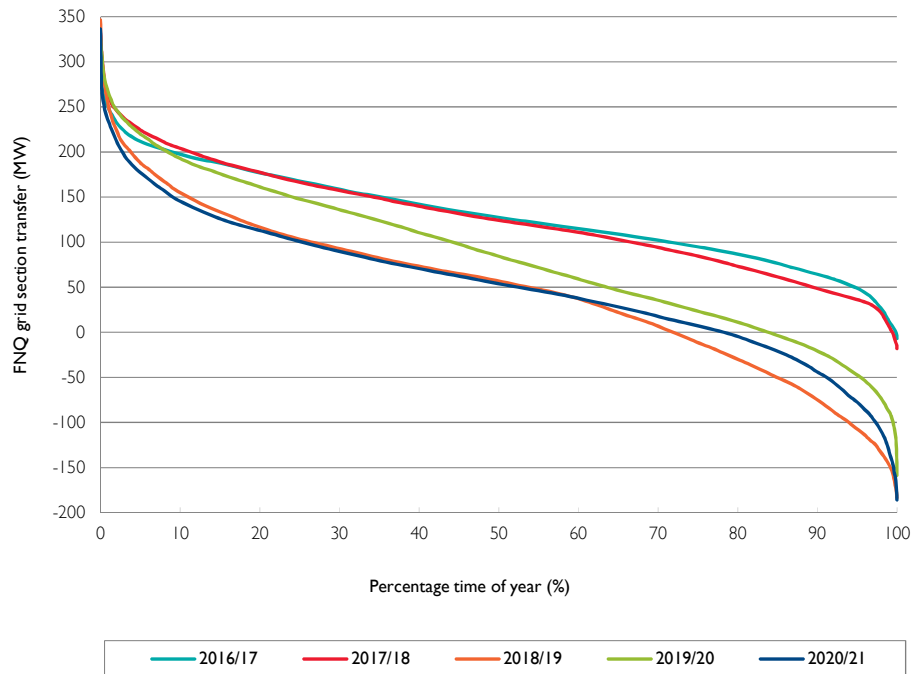

In May 2021 it was announced that the Queensland Government would invest \$40 million in transmission line infrastructure in North Queensland to establish a Queensland REZ (QREZ), with Neoen’s Kaban Wind Farm identified as the foundational proponent.

The proposed transmission augmentation works are to energise one side of the existing 132kV coastal double circuit transmission line, originally constructed to accommodate transmission at 275kV. This results in the establishment of a third 275kV transmission line into Woree. Work on the proposed transmission augmentation is expected to be completed by November 2023.

8.6.2 Central Queensland to North Queensland (CQ-NQ) grid section

Maximum power transfer across the CQ-NQ grid section may be set by thermal ratings associated with an outage of a Stanwell to Broadsound 275kV circuit, under certain prevailing ambient conditions. Power transfers may also be constrained by voltage stability limitations associated with the contingency of the Townsville gas turbine or a Stanwell to Broadsound 275kV circuit.


The limit equations in Table D.2 of Appendix D show that the following variables have a significant effect on transfer capability:

- level of Townsville gas turbine generation
- Ross and North zones shunt compensation levels.

The CQ-NQ grid section did not constrain operation during 2020/21. Information pertaining to the historical duration of constrained operation for the CQ-NQ grid section is summarised in Figure 8.11.

8 Network capability and performance

Figure 8.11 Historical CQ-NQ grid section constraint times

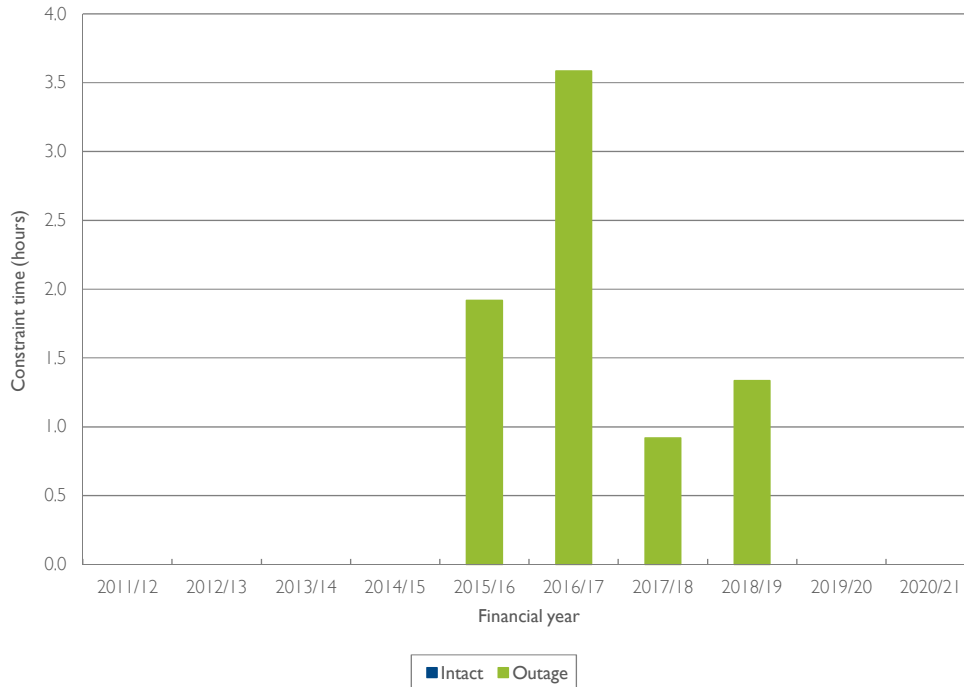

The staged commissioning of double circuit lines from Broadsound to Ross completed in 2010/11 provided increased capacity to this grid section. Since this time constraint times were associated with thermal constraint equations during planned outages to ensure operation within plant thermal ratings.

Figure 8.12 provides historical transfer duration curves showing decreases in energy transfer but similar peak continued in 2020/21. This is predominantly attributed to the addition of solar and wind farms in the Far North, Ross and North zones. The curves illustrate the ramping with commissioning activities over the last three years. Notably, peak transfers continue to be maintained at similar levels, as high net loading conditions continue to coincide (refer to figures 8.6, 8.7 and 8.8).

Figure 8.12 Historical CQ-NQ grid section transfer duration curves


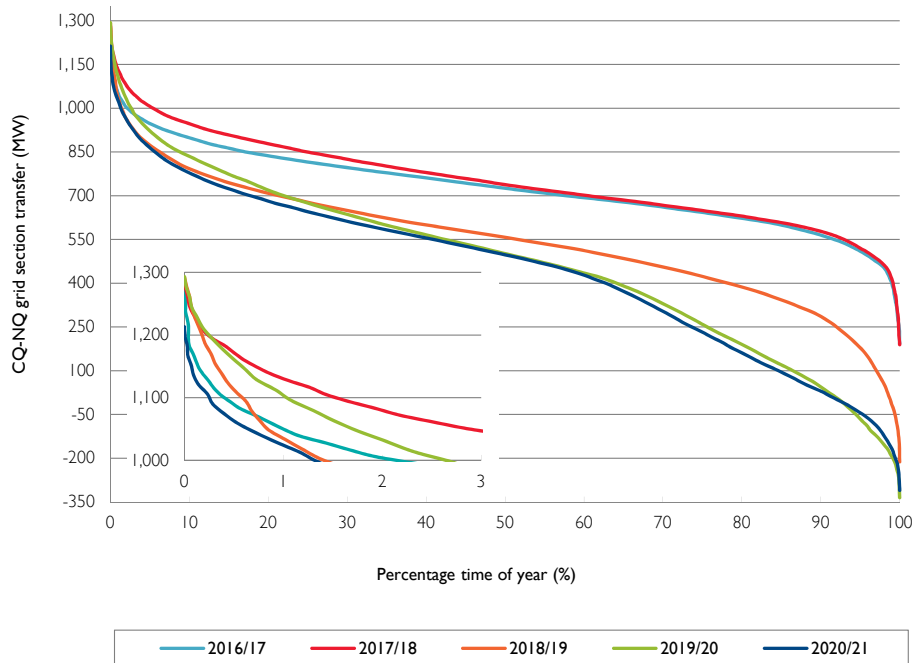


Figure 8.13 provides a different view of the altered power flows experienced over the last years for the day corresponding to the annual peak CQ-NQ transfer.

Figure 8.13 Historical CQ-NQ peak grid section transfer daily profile

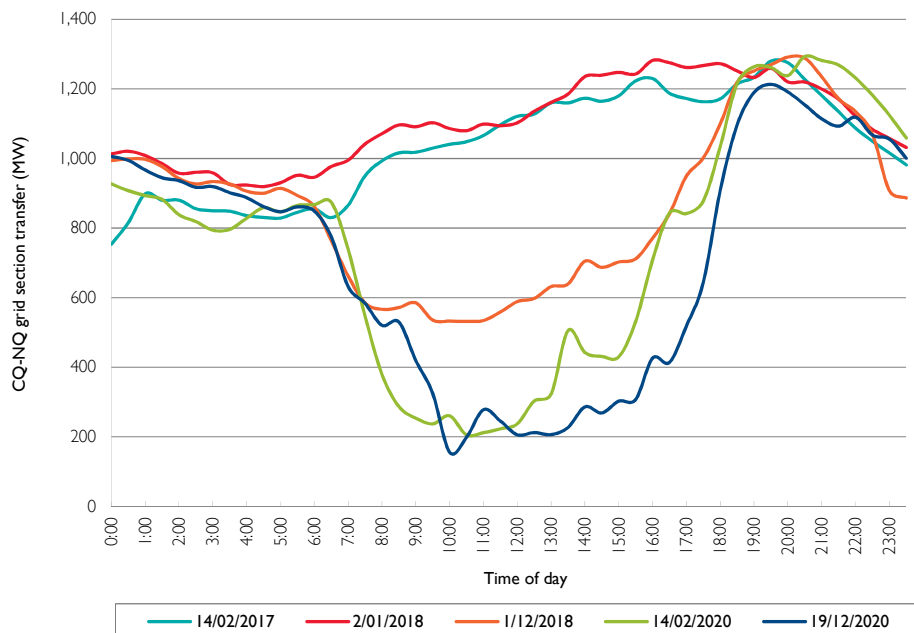

These midday reductions in transfers are introducing operational challenges in voltage control. Midday transfers are forecast to continue reducing with integration of additional rooftop PV in NQ. Correspondingly, voltage control is forecast to become increasingly challenging for longer durations.

In February 2021, Powerlink completed the Project Assessment Conclusions Report (PACR)⁷ recommending the establishment of a 150MVA 300kV bus reactor at Broadsound by June 2023.

⁷ Powerlink, [Project Assessment Conclusions Report - Managing voltage control in Central Queensland](#), February 2021.

8 Network capability and performance

8.6.3 NQ System Strength

System strength is a measure of the ability of a power system to remain stable under normal conditions and to return to a steady state condition following a system disturbance. System strength can be considered low in areas with low levels of local synchronous generation and deteriorates further with high penetration of inverter-based resources.

Powerlink has determined that the dominant limitation to VRE hosting capacity is the potential for multiple generators, and other transmission-connected dynamic plant, to interact in an unstable manner. These dynamic plant control interactions manifest as an unstable or undamped oscillation in the power system voltage. The frequency of the oscillation is dependent on the participating plants, but is broadly characterised as between 8Hz and 15Hz.

As a result of these control interactions, in April 2020 AEMO declared an immediate fault level shortfall in NQ at the Ross node. As Queensland's TNSP, and therefore System Strength Service Provider, Powerlink responded to this short fall by initially entering into an interim arrangement with CleanCo Queensland to utilise its assets in FNQ for system strength and then ultimately by retuning inverter controls at several solar farms in North Queensland and the Mt Emerald Wind Farm.

As a result of retuning of the solar farms and changes to the control settings at Mt Emerald Wind Farm the system strength requirements at the Ross node has been met (refer Section 10.4). The limit equations in Table D.3 of Appendix D reflect the impact of these changes. The limit equations show that the following variables have a significant effect on NQ system strength:

- number of synchronous units online in Central and NQ
- NQ demand.


Information pertaining to the historical duration of constrained operation for inverter-based resources in NQ is summarised in Figure 8.14. During 2020/21, inverter-based resources in NQ experienced 2,518 hours of constrained operation, of which 1,680 hours occurred during intact system conditions. Constrained operation during intact system conditions has occurred for a number of reasons:

- abnormal power system dispatches resulting in fault levels in NQ below minimum fault level requirements⁸
- Powerlink was in the process of addressing a system strength shortfall in NQ that was declared by AEMO in April 2020 (refer to sections 6.7.1 and 10.4.1)
- Two solar farms in NQ have a system strength remediation obligation and until these are in place these plant may be subject to constraints depending on the synchronous dispatch in Central and NQ.

Since the limit advice for the retuning of Mt Emerald was implemented in mid-November 2020 there have been approximately 315 hours of constrained operation, of which 35 hours occurred during intact system conditions. The limit advice for the retuning of Daydream, Hayman, Whitsunday and Hamilton solar farms was implemented in early June. The combination of these activities is expected to have a material impact in reducing constrained operation due to NQ system strength during intact system conditions.

⁸ AEMO, Notice of Queensland System Strength Requirements and Ross Fault Level Shortfall, July 2018.

Figure 8.14 Historical NQ system strength constraint times

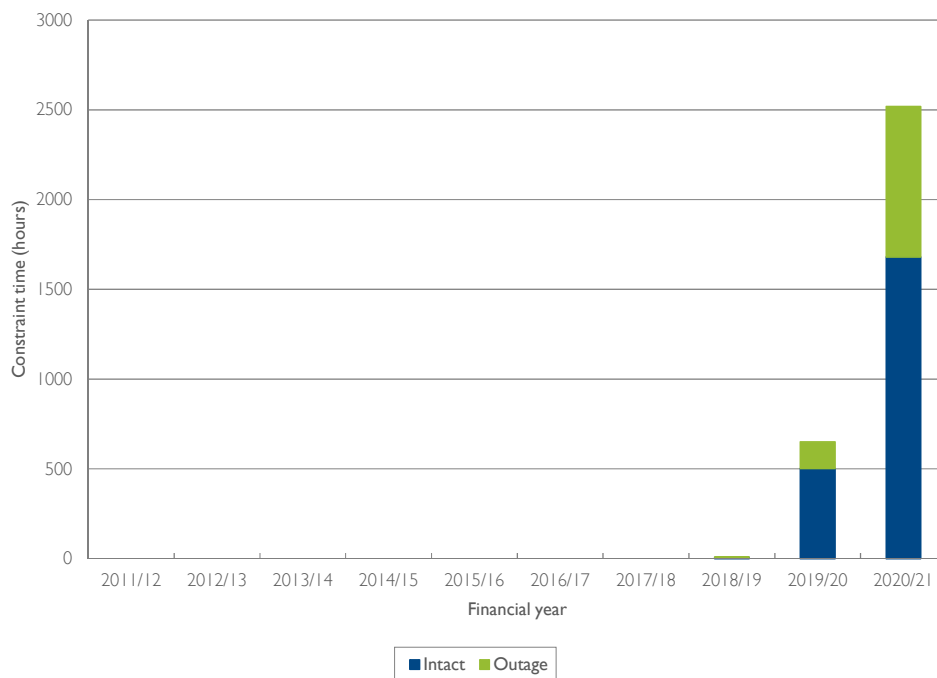

8.6.4 Gladstone grid section


Maximum power transfer across the Gladstone grid section is set by the thermal rating of the Bouldercombe to Raglan, Larcom Creek to Calliope River, Calvale to Wurdong or the Calliope River to Wurdong 275kV circuits.

If the rating would otherwise be exceeded following a critical contingency, generation is constrained to reduce power transfers. Powerlink makes use of dynamic line ratings and rates the relevant circuits to take account of real time prevailing ambient weather conditions to maximise the available capacity of this grid section and, as a result, reduce market impacts. The appropriate ratings are updated in National Electricity Market Dispatch Engine (NEMDE).

Information pertaining to the historical duration of constrained operation for the Gladstone grid section is summarised in Figure 8.15. During 2020/21, the Gladstone grid section experienced 62 hours of constrained operation, 40 hours during intact system conditions due to low Gladstone Power Station generation.


8 Network capability and performance

Figure 8.15 Historical Gladstone grid section constraint times

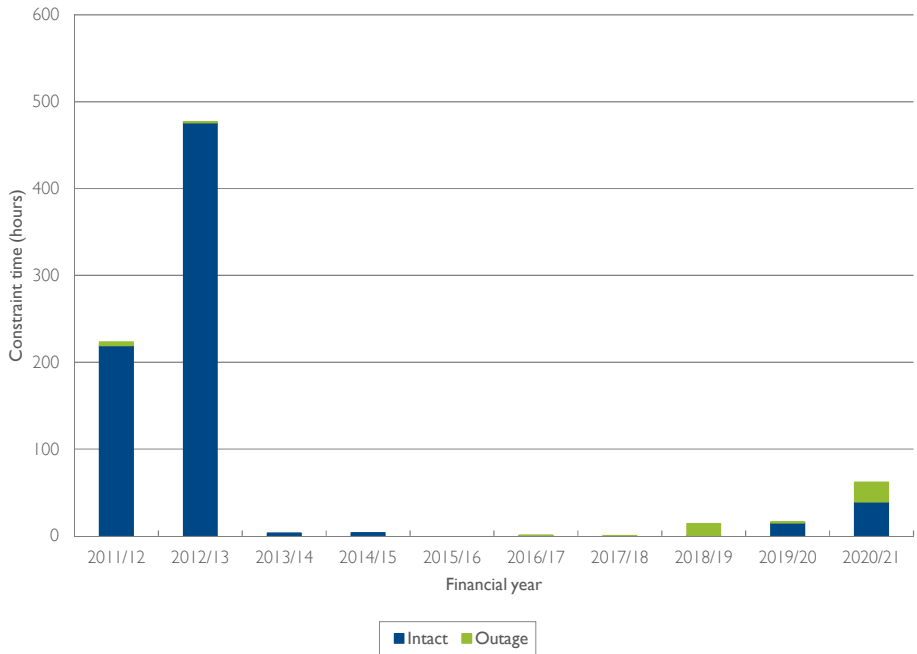

Power flows across this grid section are highly dependent on the dispatch of generation in CQ and transfers to southern Queensland. Figure 8.16 provides historical transfer duration curves showing increased utilisation in 2020/21 compared to 2019/20. Reduced capacity factor from Gladstone Power Station is predominantly responsible for the increase in transfer through this grid section (refer to figures 8.6, 8.7 and 8.8).

Figure 8.16 Historical Gladstone grid section transfer duration curves

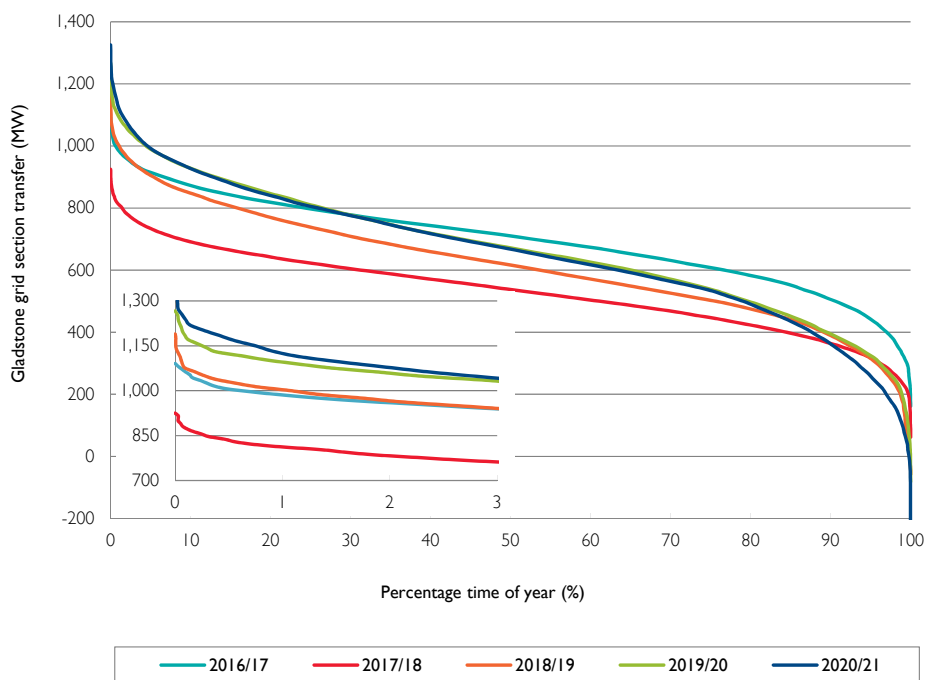

The utilisation of the Gladstone grid section is expected to continue to increase if the recently committed generators displace Gladstone zone generation.

8.6.5 CQ-SQ grid section

Maximum power transfer across the CQ-SQ grid section is set by transient or voltage stability following a Calvale to Halys 275kV circuit contingency.

The voltage stability limit is set by insufficient reactive power reserves in the Central West and Gladstone zones following a contingency. More generating units online in these zones increase reactive power support and therefore transfer capability.

The limit equation in Table D.4 of Appendix D shows that the following variables have significant effect on transfer capability:

- number of generating units online in the Central West and Gladstone zones
- level of Gladstone Power Station generation.

Information pertaining to the historical duration of constrained operation for the CQ-SQ grid section is summarised in Figure 8.17. During 2020/21, the CQ-SQ grid section experienced 54 hours of constrained operation. Constrained operation was mainly associated with planned maintenance outages, with only 5 hours constrained during system normal operation.

Figure 8.17 Historical CQ-SQ grid section constraint times


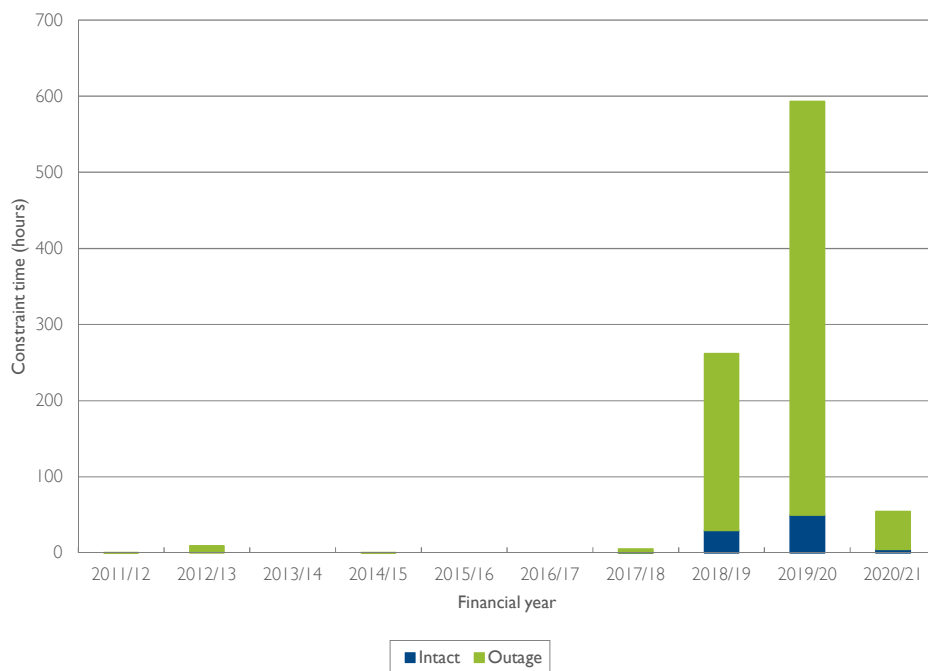


Figure 8.18 provides historical transfer duration curves showing continued increase in utilisation since 2015, then reducing over 2020/21. This increase in transfer has been predominantly due to a significant reduction in generation from the gas fuelled generators in the Bulli zone and higher interconnector transfers sourced predominantly by generation in central and north Queensland. Over 2020/21 output from the large thermal generators in central Queensland markedly reduced (refer to figures 8.6, 8.7 and 8.8). The utilisation of the CQ-SQ grid section is highly dependent on the operation of central Queensland thermal generation.

8 Network capability and performance

Figure 8.18 Historical CQ-SQ grid section transfer duration curves

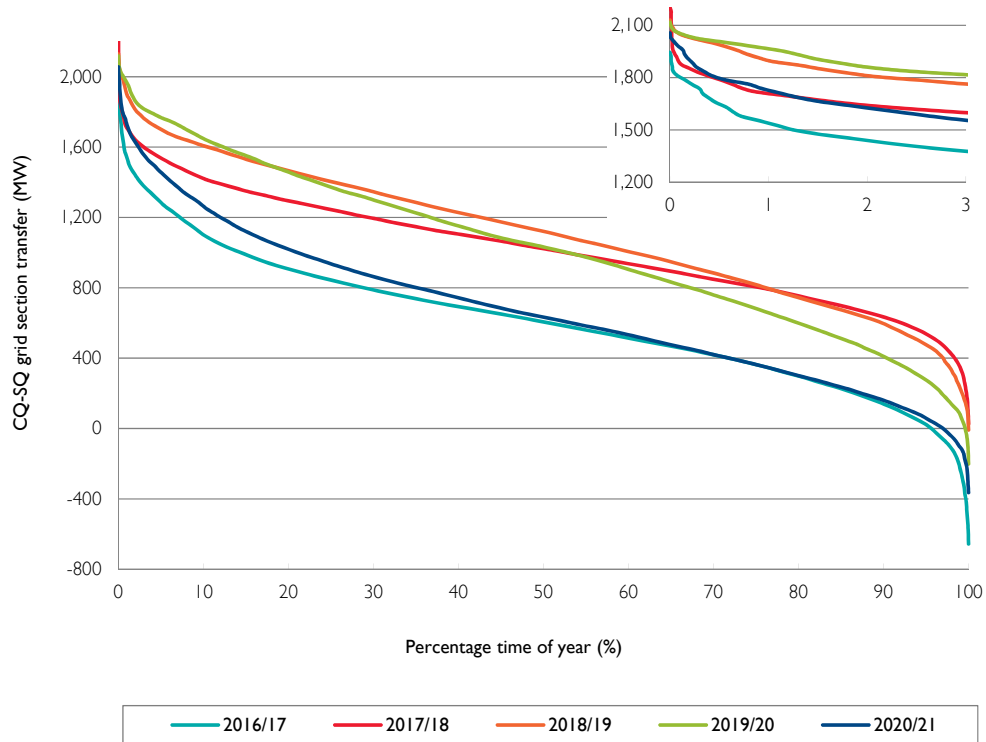

The eastern single circuit transmission lines of CQ-SQ traverse a variety of environmental conditions that have different rates of corrosion resulting in varied risk levels across the transmission lines. Depending on transmission line location, it is expected that sections of lines will be at end of technical service life from the next five to 10 years. This is discussed in Section 8.7.6.

8.6.6 Surat grid section


The Surat grid section was introduced in the 2014 TAPR in preparation for the establishment of the Western Downs to Columboola 275kV transmission line, Columboola to Wandoan South 275kV transmission line and Wandoan South and Columboola 275kV substations. These network developments were completed in September 2014 and significantly increased the supply capacity to the Surat Basin north west area.

The maximum power transfer across the Surat grid section is set by voltage stability associated with insufficient reactive power reserves in the Surat zone following an outage of a Western Downs to Orana 275kV circuit⁹. More generating units online in the zone increases reactive power support and therefore transfer capability. Local generation reduces transfer capability but allows more demand to be securely supported in the Surat zone. There have been no constraints recorded over the brief history of the Surat grid section.

Figure 8.19 provides the transfer duration curve since the zone's creation. Grid section transfers depict the ramping of coal seam gas (CSG) load. The zone has transformed from a net exporter to a significant net importer of energy. Energy transfers are expected to reduce with the commitment of Bluegrass, Columboola, Gangarri and Edenvale solar farms and Dulacca Wind Farm.

⁹ The Orana Substation is connected to one of the Western Downs to Columboola 275kV transmission lines (refer to Figure 8.4).

Figure 8.19 Historical Surat grid section transfer duration curve

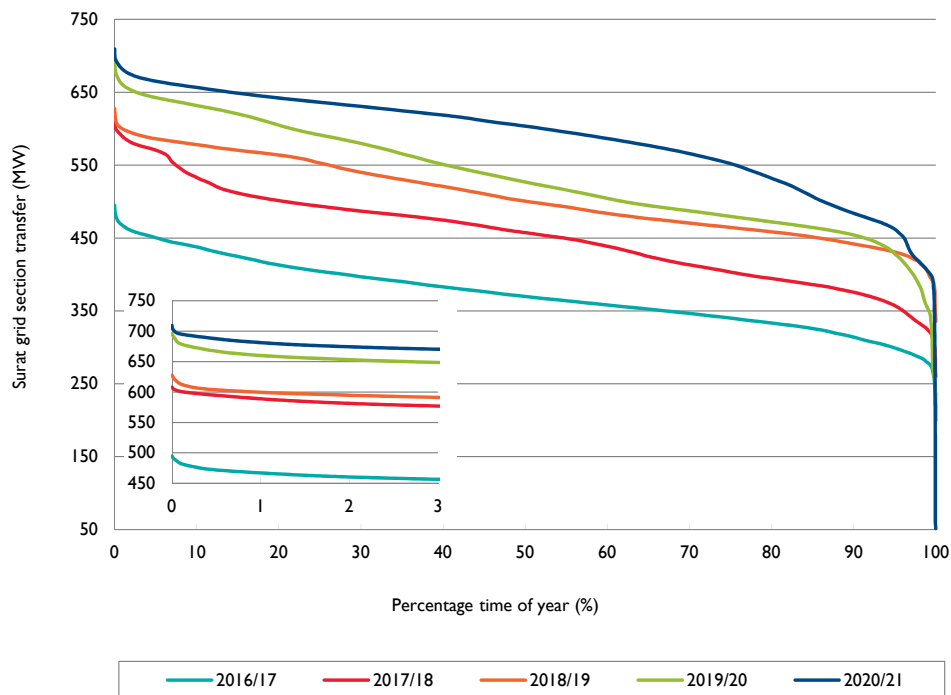

Network augmentations are not planned to occur as a result of network limitations across this grid section within the five-year outlook period.

The development of large loads in Surat (additional to those included in the forecasts), without corresponding increases in generation, can significantly increase the levels of Surat grid section transfers. This is discussed in Section 9.2.5.

8.6.7 South West Queensland (SWQ) grid section

The SWQ grid section defines the capability of the transmission network to transfer power from generating stations located in the Bulli zone and northerly flow on QNI to the rest of Queensland. Maximum power transfer across the SWQ grid section is set by the thermal rating of the Middle Ridge 330/275kV transformer.

The SWQ grid section did not constrain operation during 2020/21. Information pertaining to the historical duration of constrained operation for the SWQ grid section is summarised in Figure 8.20.

8 Network capability and performance

Figure 8.20 Historical SWQ grid section constraint times


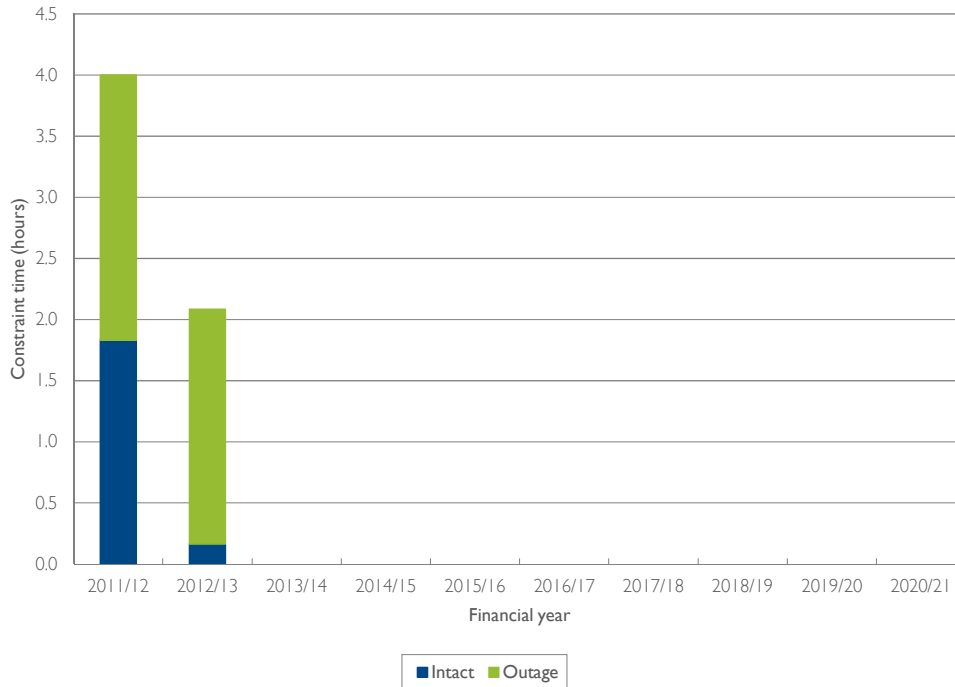


Figure 8.21 provides historical transfer duration curves showing reductions in energy transfer since 2016/17. Reductions in South West, Wide Bay, Moreton and Gold Coast delivered demands and increases in transmission connected generation in the South West zone (refer to figures 8.6, 8.7 and 8.8) are predominantly responsible for the reduction in SWQ utilisation.

Figure 8.21 Historical SWQ grid section transfer duration curves

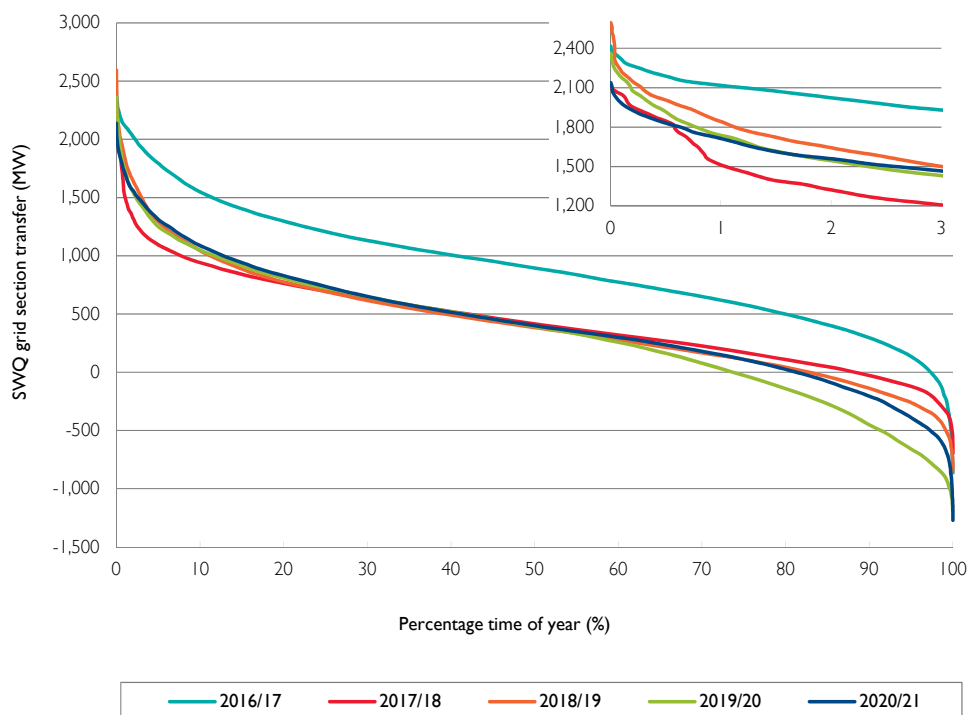

Network augmentations are not planned to occur as a result of network limitations across this grid section within the five-year outlook period.

8.6.8 Tarong grid section

Maximum power transfer across the Tarong grid section is set by voltage stability associated with the loss of a Calvale to Halys 275kV circuit. The limitation arises from insufficient reactive power reserves in southern Queensland.


Limit equations in Table D.5 of Appendix D show that the following variables have a significant effect on transfer capability:

- QNI transfer and South West and Bulli zones generation
- level of Moreton zone generation
- Moreton and Gold Coast zones capacitive compensation levels.

Any increase in generation west of this grid section, with a corresponding reduction in generation north of the grid section, reduces the CQ-SQ power flow and increases the Tarong limit. Increasing generation east of the grid section reduces the transfer capability, but increases the overall amount of supportable South East Queensland (SEQ) demand. This is because reactive margins increase with additional local generation, allowing further load to be delivered before reaching minimum allowable reactive margins. However, due to its distributed and reactive nature, increases in delivered demand erode reactive margins at greater rates than they were created by the additional local generation. Limiting power transfers are thereby lower with the increased local generation but a greater load can be delivered.

The Tarong grid section did not constrain operation during 2020/21. Information pertaining to the historical duration of constrained operation for the Tarong grid section is summarised in Figure 8.22.

Figure 8.22 Historical Tarong grid section constraint times

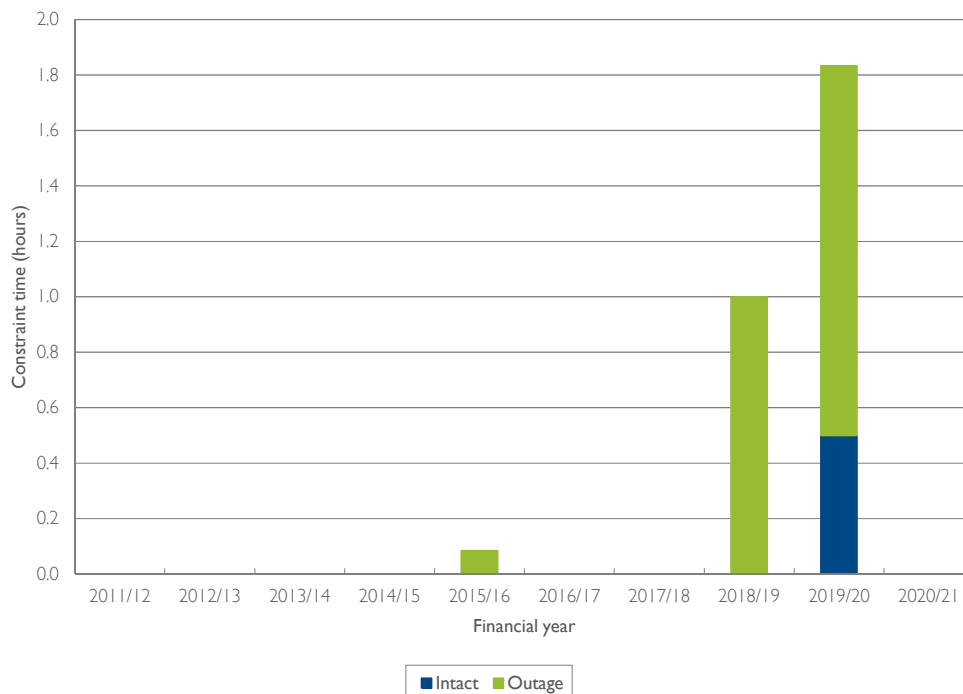


Constraint times have been minimal over the last 10 years.

Figure 8.23 provides historical transfer duration curves showing small annual differences in grid section transfer demands. The reduction in transfer between 2016/17 and 2017/18 is predominantly attributed to the return to service of Swanbank E from its mothballed state. The 2020/21 trace reflects slight increase over 2019/20 energy transfers into SEQ as a result of lower CQSQ transfers (refer to figures 8.6, 8.7 and 8.8).

8 Network capability and performance

Figure 8.23 Historical Tarong grid section transfer duration curves

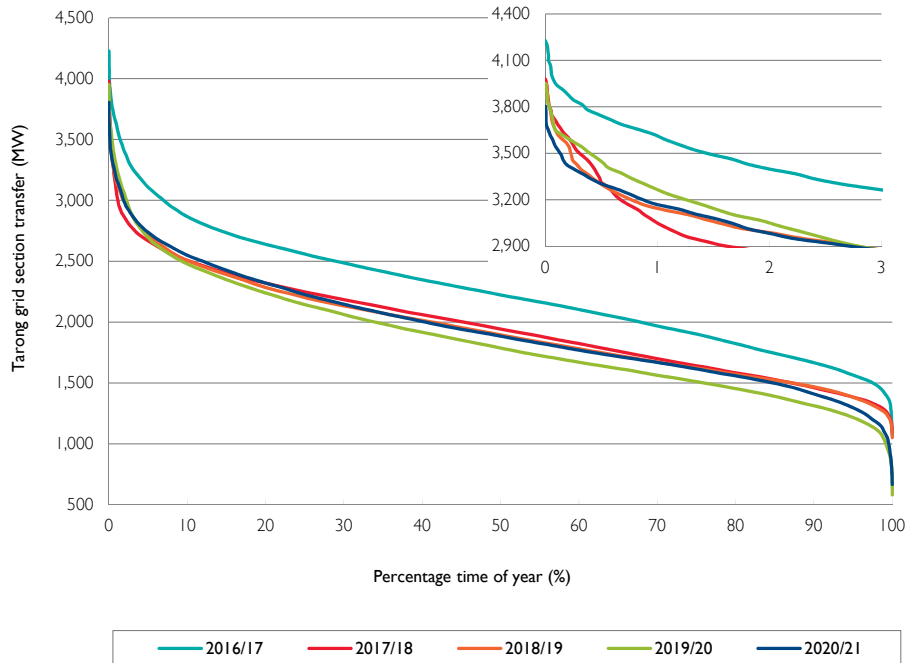

Network augmentations are not planned to occur as a result of network limitations across this grid section within the five year outlook period.

8.6.9 Gold Coast grid section

Maximum power transfer across the Gold Coast grid section is set by voltage stability associated with the loss of a Greenbank to Molendinar 275kV circuit, or Greenbank to Mudgeeraba 275kV circuit.


The limit equation in Table D.6 of Appendix D shows that the following variables have a significant effect on transfer capability:

- number of generating units online in Moreton zone
- level of Terranora Interconnector transmission line transfer
- Moreton and Gold Coast zones capacitive compensation levels
- Moreton zone to the Gold Coast zone demand ratio.

Reducing southerly flow on Terranora Interconnector reduces transfer capability, but increases the overall amount of supportable Gold Coast demand. This is because reactive margins increase with reductions in southerly Terranora Interconnector flow, allowing further load to be delivered before reaching minimum allowable reactive margins. However, due to its distributed and reactive nature, increases in delivered demand erode reactive margins at greater rates than they were created by the reduction in Terranora Interconnector southerly transfer. Limiting power transfers are thereby lower with reduced Terranora Interconnector southerly transfer but a greater load can be delivered.

The Gold Coast grid section did not constrain operation during 2020/21. Information pertaining to the historical duration of constrained operation for the Gold Coast grid section is summarised in Figure 8.24.

Figure 8.24 Historical Gold Coast grid section constraint times

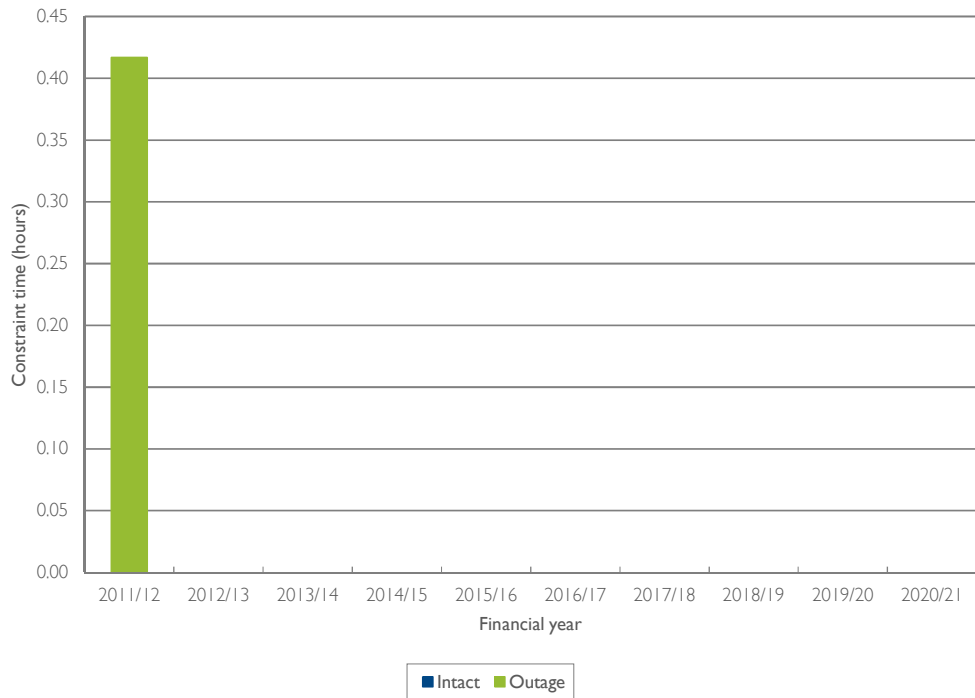


Constraint times have been minimal over the last 10 years.

8 Network capability and performance

Figure 8.25 provides historical transfer duration curves showing changes in grid section transfer demands and energy in line with changes in transfer to northern NSW and changes in Gold Coast loads. Northern NSW transfers and Gold Coast zone demand were lower in 2020/21 compared to 2019/20 (refer to figures 8.6, 8.7 and 8.8).

Figure 8.25 Historical Gold Coast grid section transfer duration curves

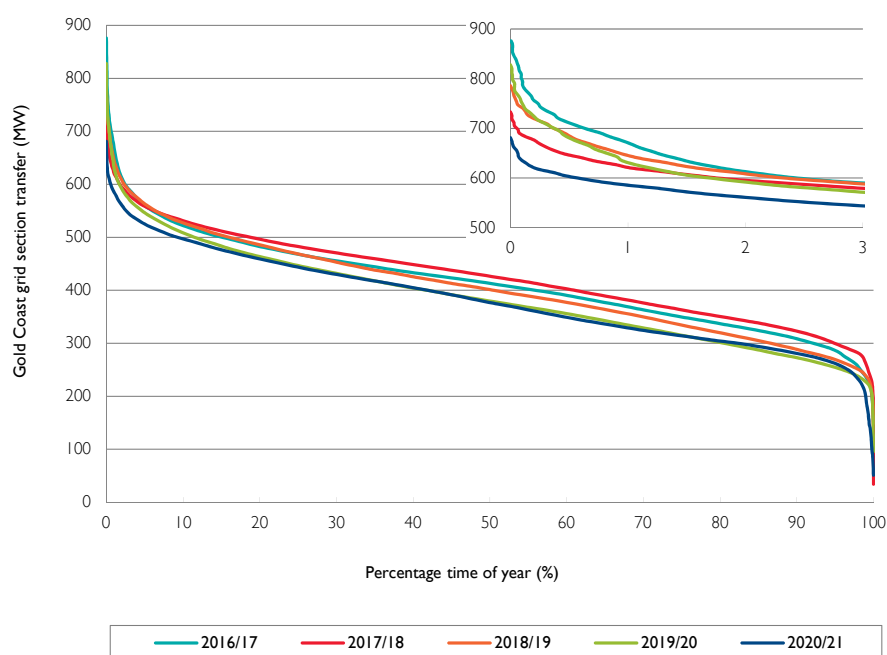

Due to condition drivers, Powerlink is retiring one of the aging 275/110kV transformers at Mudgeeraba Substation by June 2022. This is listed in Table 11.7.

8.6.10 QNI and Terranora interconnector

The transfer capability across QNI is limited by voltage stability, transient stability, oscillatory stability, and line thermal rating considerations. The capability across QNI at any particular time is dependent on a number of factors, including demand levels, generation dispatch, status and availability of transmission equipment, and operating conditions of the network.

AEMO publish Monthly Constraint Reports which includes a section examining each of the NEM interconnectors, including QNI and Terranora Interconnector. Information pertaining to the historical duration of constrained operation for QNI and Terranora Interconnector is contained in these Monthly Constraint Reports. The Monthly Constraint Report can be found on AEMO's [website](#).

For intact system operation, the southerly transfer capability of QNI is most likely to be set by the following:

- voltage stability associated with a fault on the Sapphire to Armidale 330kV transmission line in NSW
- transient stability associated with transmission faults near the Queensland border
- transient stability associated with the trip of a smelter potline load in Queensland
- transient stability associated with transmission faults in the Hunter Valley in NSW
- transient stability associated with a fault on the Hazelwood to South Morang 500kV transmission line in Victoria
- thermal capacity of the 330kV transmission network between Armidale and Liddell in NSW
- oscillatory stability upper limit of 1,200MW.

For intact system operation, the combined northerly transfer capability of QNI and Terranora Interconnector is most likely to be set by the following:

- transient and voltage stability associated with transmission line faults in NSW
- transient stability and voltage stability associated with loss of the largest generating unit in Queensland
- thermal capacity of the 330kV and 132kV transmission network within northern NSW
- oscillatory stability upper limit of 700MW.

In December 2019, Powerlink and TransGrid finalised a Project Assessment Conclusion Report (PACR) on '[Expanding NSW-Queensland transmission transfer capacity](#)', identifying the preferred option which includes upgrading the 330kV Liddell to Tamworth 330kV lines, and installing Static VAr Compensators (SVC) at Tamworth and Dumaresq substations and static capacitor banks at Tamworth, Armidale and Dumaresq substations. The project is expected to be completed by mid 2022.

AEMO's Integrated System Plan (ISP) continues to investigate opportunities for expansion of interconnector capacity. In the 2020 ISP AEMO identified QNI Medium and Large projects as future ISP projects, requiring Powerlink and TransGrid to undertake preparatory activities (refer to Section 9.3.1). As requested, Powerlink and TransGrid submitted preparatory activities to AEMO by 30 June 2021¹⁰.

8.7 Zone performance

This section presents, where applicable, a summary of:

- the capability of the transmission network to deliver loads
- historical zonal transmission delivered loads
- intra-zonal system normal constraints
- double circuit transmission lines categorised as vulnerable by AEMO¹¹
- Powerlink's management of high voltages associated with light load conditions.

Double circuit transmission lines that experience a lightning trip of all phases of both circuits (where its magnitude or degree is not considered an Exceptional Event¹²) are categorised by AEMO as vulnerable. A double circuit transmission line in the vulnerable list is eligible to be reclassified as a credible contingency event during a lightning storm if a cloud to ground lightning strike is detected close to the line. A double circuit transmission line will remain on the vulnerable list until it is demonstrated that the asset characteristics have been improved to make the likelihood of a double circuit lightning trip no longer reasonably likely to occur or until the Lightning Trip Time Window (LTTW) expires from the last double circuit lightning trip. The LTTW is three years for a single double circuit trip event or five years where multiple double circuit trip events have occurred during the LTTW.

Zonal transmission delivered energy, in general, has declined in 2020/21, compared to 2019/20 (refer to Figure 8.8), significant increases in embedded VRE generation and Queensland region's installed rooftop PV reaching approximately 4,074MW by 30 June 2021¹³. Figure 3.12 provides annual transmission delivered demand load duration curves for the Queensland region.

8.7.1 Far North zone

The Far North zone experienced no load loss for a single network element outage during 2020/21.

The Far North zone includes the non-scheduled embedded generator Lakeland Solar and Storage as defined in Figure 3.5. This embedded generator provided approximately 20GWh during 2020/21.

¹⁰ Powerlink, [Powerlink Preparatory Activities QNI Medium and Large](#), June 2021.

¹¹ AEMO, [SO_OP_3715 – Power System Security Guidelines](#), April 2021.


¹² An Exception Event is defined in AEMO's Power System Security Guidelines ([SO_OP_3715](#)) as a simultaneous trip of a double circuit transmission line during a lightning storm caused by an event that is far beyond what is usual in magnitude or degree for what could be reasonably expected to occur during a lightning storm.

¹³ Clean Energy Regulator, [Postcode data for small-scale installations – all data](#), data as at 31/08/2021, September 2021.

8 Network capability and performance

Figure 8.26 provides historical transmission delivered load duration curves for the Far North zone. Energy delivered from the transmission network continues to reduce at 4.8% between 2019/20 and 2020/21, to the lowest level in the last decade. The maximum transmission delivered demand in the zone was 337MW, which is below the highest maximum demand over the last five years of 381MW set in 2018/19. The minimum transmission delivered demand in the zone was 64MW, which is the lowest minimum demand over the last five years.

Figure 8.26 Historical Far North zone transmission delivered load duration curves

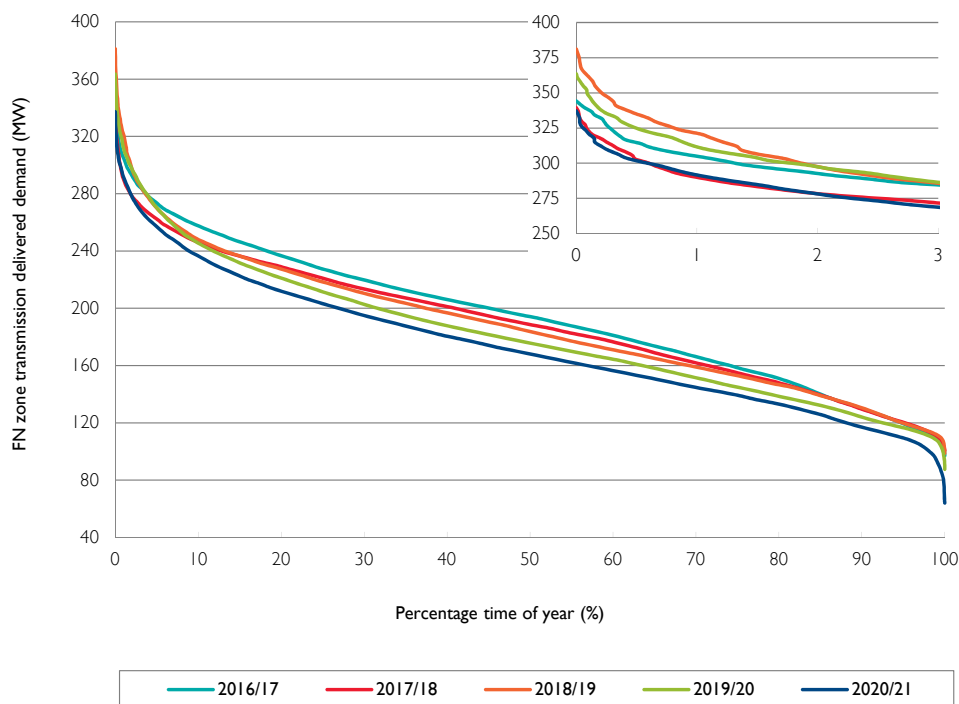

High voltages associated with light load conditions continue to become increasingly challenging for longer durations. Energy Queensland will, over time, lower off-load tap settings on many distribution transformers. This requires localised network outages, and in many instances will be set to the last remaining tap setting.

AEMO has, this year, removed Chalumbin to Turkinje 132kV transmission line from the vulnerable list. There are currently no double circuits in the Far North zone in AEMO's lightning vulnerable transmission line list.


8.7.2 Ross zone

The Ross zone experienced no load loss for a single network element outage during 2020/21.

The Ross zone includes the scheduled embedded Townsville Power Station 66kV component (steam turbine component of the CCGT), semi-scheduled distribution connected embedded Kidston Solar Farm, Kennedy Energy Park and direct connected embedded Sun Metals Solar Farm, and the significant non-scheduled embedded generators Hughenden Solar Farm and Pioneer Mill as defined in Figure 3.5. These embedded generators provided approximately 335GWh during 2020/21.

Figure 8.27 provides historical transmission delivered load duration curves for the Ross zone. Energy delivered from the transmission network has increased by 4.2% between 2019/20 and 2020/21. The increase in energy delivered is predominantly due to the reduction in energy from embedded generation. The peak transmission delivered demand in the zone was 552MW which is below the highest maximum demand over the last five years of 574MW set in 2016/17. The minimum transmission delivered demand in the zone was 59MW, which is above the lowest demand over the last five years of 36MW set in 2018/19.

Figure 8.27 Historical Ross zone transmission delivered load duration curves

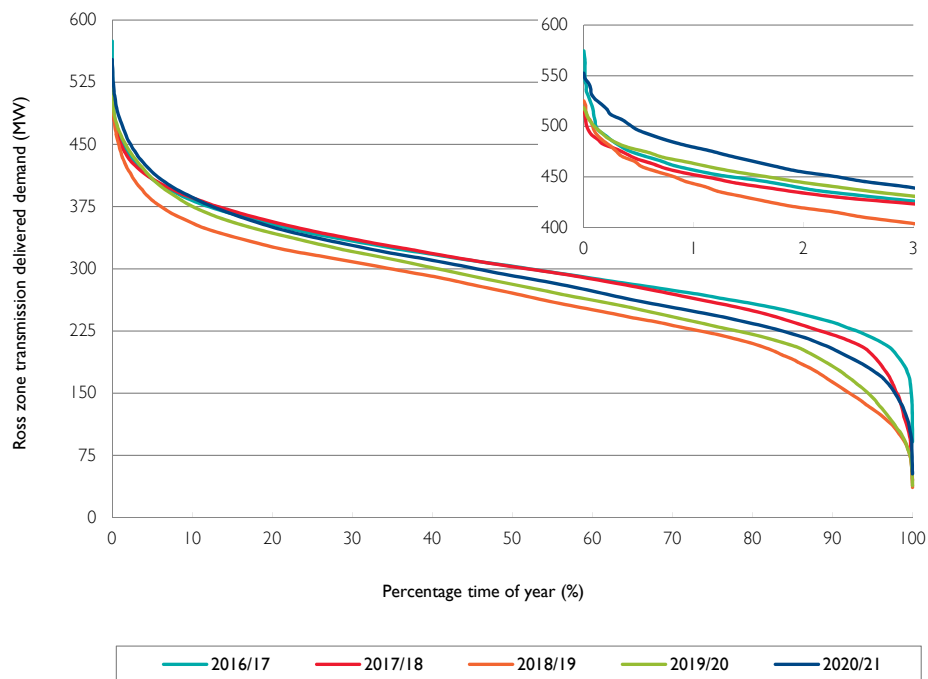

High voltages associated with light load conditions are managed with existing reactive sources.

As a result of double circuit outages associated with lightning strikes, AEMO includes the Ross to Chalumbin 275kV double circuit transmission line in the vulnerable list. This double circuit tripped due to lightning in January 2020.

8.7.3 North zone


The North zone experienced no load loss for a single network element outage during 2020/21.

The North zone includes the scheduled embedded Mackay generator, semi-scheduled embedded generator Collinsville Solar Farm and significant non-scheduled embedded generators Moranbah North, Moranbah and Racecourse Mill as defined in Figure 3.5. These embedded generators provided approximately 569GWh during 2020/21.

Figure 8.28 provides historical transmission delivered load duration curves for the North zone. Energy delivered from the transmission network has reduced by 3.3% between 2019/20 and 2020/21, to the lowest level in the last decade. The peak transmission delivered demand in the zone was 434MW, which is below the highest maximum demand over the last five years of 473MW set in 2018/19. The minimum transmission delivered demand in the zone was 122MW, which is the lowest minimum demand in the last five years when excluding the minimum of 32MW set in 2016/17 as a result of lost load following Ex-Tropical Cyclone Debbie.

8 Network capability and performance

Figure 8.28 Historical North zone transmission delivered load duration curves

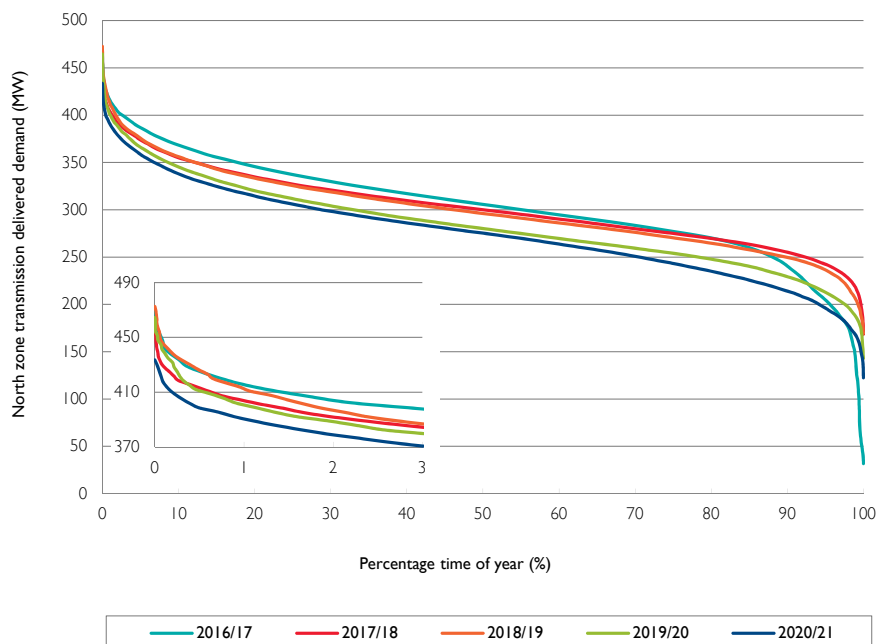

High voltages associated with light load conditions are currently managed with existing reactive sources. However, midday power transfer levels continue to reduce as capacity is released from commissioning activities of VRE generators and additional rooftop PV is installed in NQ. As a result, voltage control is forecast to become increasingly challenging for longer durations. This is discussed in Section 8.6.2.

As a result of double circuit outages associated with lightning strikes, AEMO includes the following double circuits in the North zone in the vulnerable list:

- Strathmore to Clare South and Collinsville North to King Creek to Clare South 132kV double circuit transmission line, last tripped January 2019
- Collinsville North to Proserpine 132kV double circuit transmission line, last tripped February 2018.

The following double circuits have, this year, been removed from the vulnerable list:

- Collinsville North to Stony Creek and Collinsville North to Newlands 132kV double circuit transmission line, last tripped February 2016
- Goonyella to North Goonyella and Goonyella to Newlands 132kV double circuit transmission line, last tripped February 2018.


8.7.4 Central West zone

The Central West zone experienced no load loss for a single network element outage during 2020/21.

The Central West zone includes the scheduled embedded Barcaldine generator, semi-scheduled embedded generators Clermont Solar Farm, Emerald Solar Farm and Middlemount Solar Farm and significant non-scheduled embedded generators Barcaldine Solar Farm, Longreach Solar Farm, German Creek and Oaky Creek as defined in Figure 3.5. These embedded generators provided approximately 739GWh during 2020/21.

Figure 8.29 provides historical transmission delivered load duration curves for the Central West zone. Energy delivered from the transmission network has reduced by 1.6% between 2019/20 and 2020/21, to the lowest level in the last decade. The peak transmission delivered demand in the zone was 537MW, which is below the highest maximum demand over the last five years of 555MW set in 2019/20. The minimum transmission delivered demand in the zone was 366MW, which is the lowest minimum demand over the last five years.

Figure 8.29 Historical Central West zone transmission delivered load duration curves

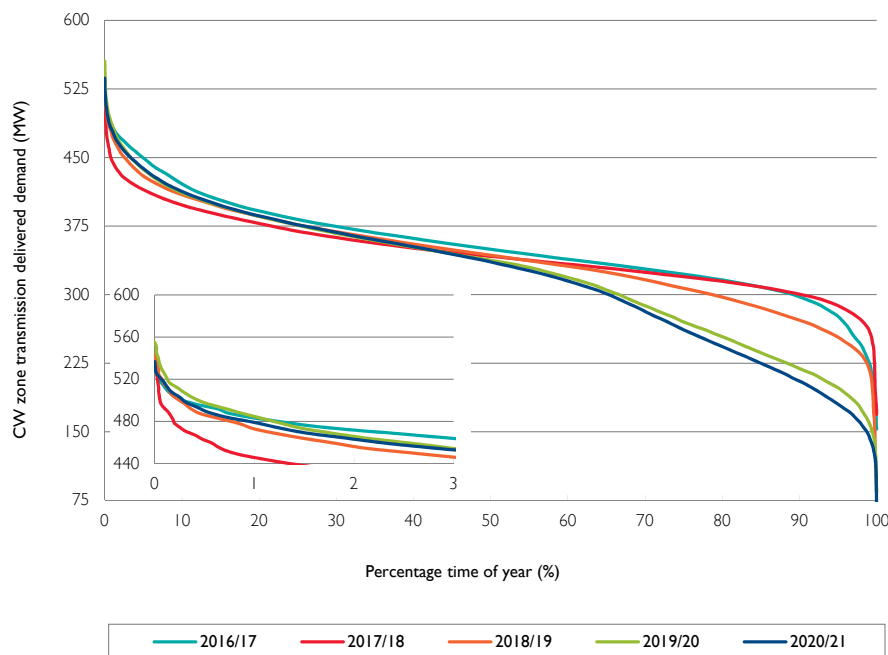

EDL has advised AEMO of its intention to retire Oaky Creek non-scheduled embedded generators in 2025.

There are currently no double circuits in the Central West zone in AEMO's lightning vulnerable transmission line list.

8.7.5 Gladstone zone


The Gladstone zone experienced no load loss for a single network element outage during 2020/21.

The Gladstone zone contains no scheduled, semi-scheduled or significant non-scheduled embedded generators as defined in Figure 3.5.

Figure 8.30 provides historical transmission delivered load duration curves for the Gladstone zone. The figure clearly shows a reduction in demand between 2015/16 and 2016/17 due to changed operation by Boyne Smelters Limited (BSL). Energy delivered from the transmission network has increased by 0.9% between 2019/20 and 2020/21. The peak transmission delivered demand in the zone was 1,132MW, which is below the highest maximum demand over the last five years of 1,266MW set in 2016/17. Minimum demand coincides with small periods when one or more smelter potlines are out of service. The minimum transmission delivered demand in the zone was 366MW, which is the lowest minimum demand over the last five years.

8 Network capability and performance


Figure 8.30 Historical Gladstone zone transmission delivered load duration curves

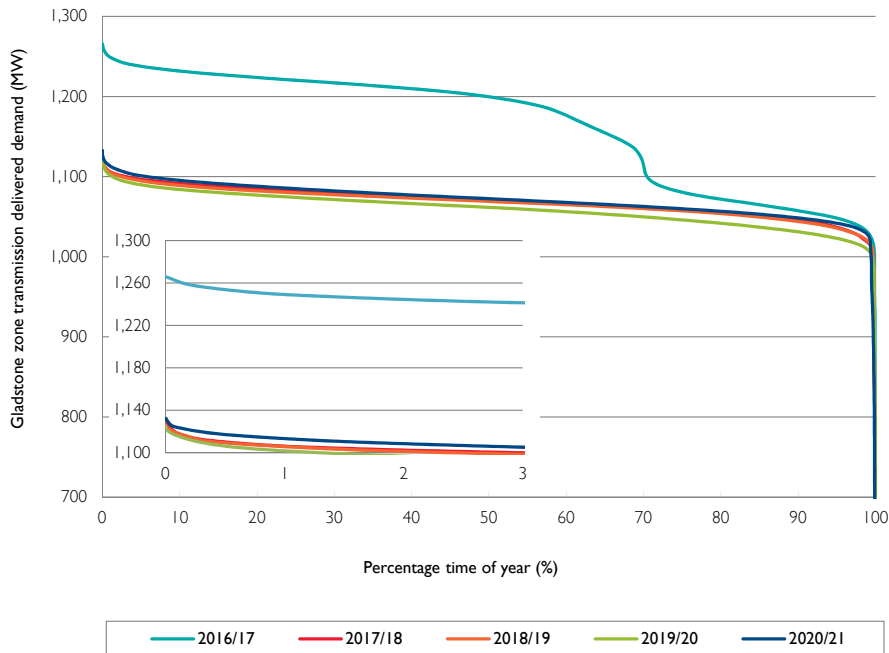

Constraints occur within the Gladstone zone under intact network conditions. These constraints are associated with maintaining power flows within the continuous current rating of a 132kV feeder bushing within BSL's substation. The constraint limits generation from Gladstone Power Station, mainly from the units connected at 132kV. AEMO identifies the system normal constraint by constraint identifier Q>NIL_BI_FB. This constraint was implemented in AEMO's market system from September 2011.

Information pertaining to the historical duration of constrained operation due to this constraint is summarised in Figure 8.31. During 2020/21, the feeder bushing constraint experienced 106 hours of constrained operation, 15 hours during planned outage of 275kV feeders between Calliope River and Woollooga.

Figure 8.31 Historical Boyne Island feeder bushing constraint times

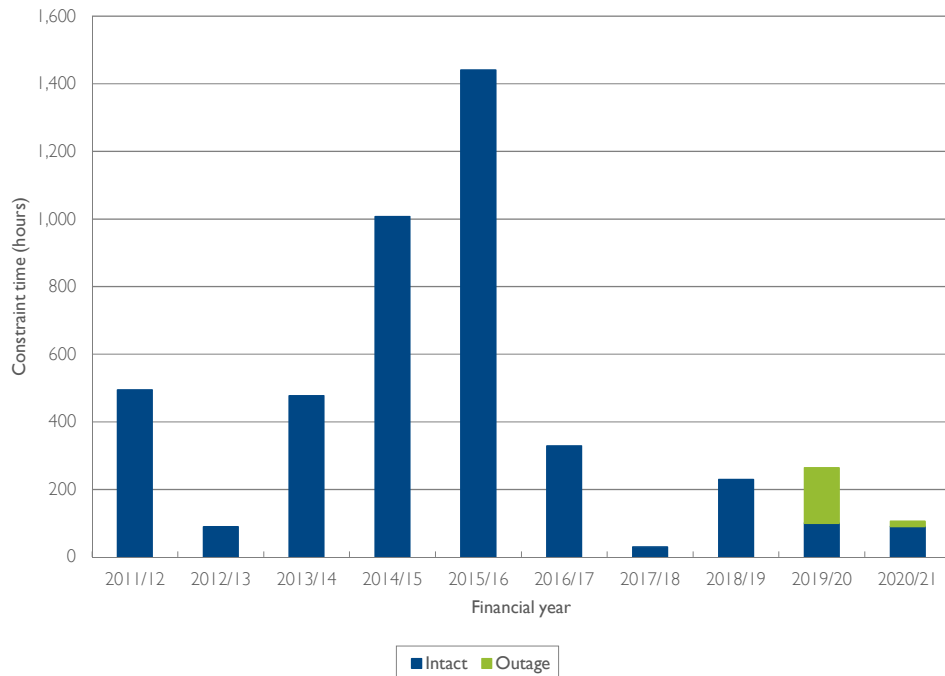

There are currently no double circuits in the Gladstone zone in AEMO's lightning vulnerable transmission line list.

8.7.6 Wide Bay zone

The Wide Bay zone experienced no load loss for a single network element outage during 2020/21.

The Wide Bay zone includes the semi-scheduled embedded generators Childers Solar Farm and Susan River Solar Farm, and significant non-scheduled embedded generator Isis Central Sugar Mill as defined in Figure 3.5. These embedded generators provided approximately 264GWh during 2020/21.

Figure 8.32 provides historical transmission delivered load duration curves for the Wide Bay zone. Wide Bay zone is one of two zones in Queensland where the delivered demand reaches negative values, meaning that the embedded generation exceeds the native load, the transmission network supplying the zone is often operated at zero and near zero loading, and the embedded generation makes use of the transmission network to feed loads in other zones. Figure 8.33 provides the daily load profile for the minimum transmission delivered days over the last five years.

Whilst energy has seen significant reductions, the peak demand, which occurs at night, remains at similar levels. Energy delivered from the transmission network reduced by 5.9% between 2019/20 and 2020/21, to the lowest level in the last decade. The peak transmission delivered demand in the zone was 316MW, which is the highest maximum demand. The minimum transmission delivered demand in the zone was -88MW, which is the lowest demand on record.

8 Network capability and performance

Figure 8.32 Historical Wide Bay zone transmission delivered load duration curves


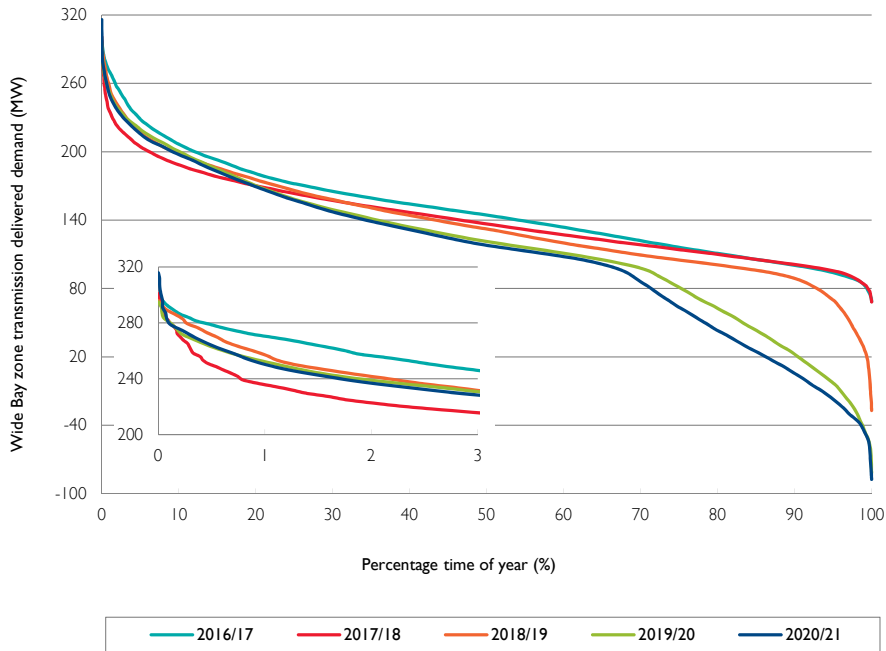


Figure 8.33 Historical Wide Bay zone minimum transmission delivered daily profile

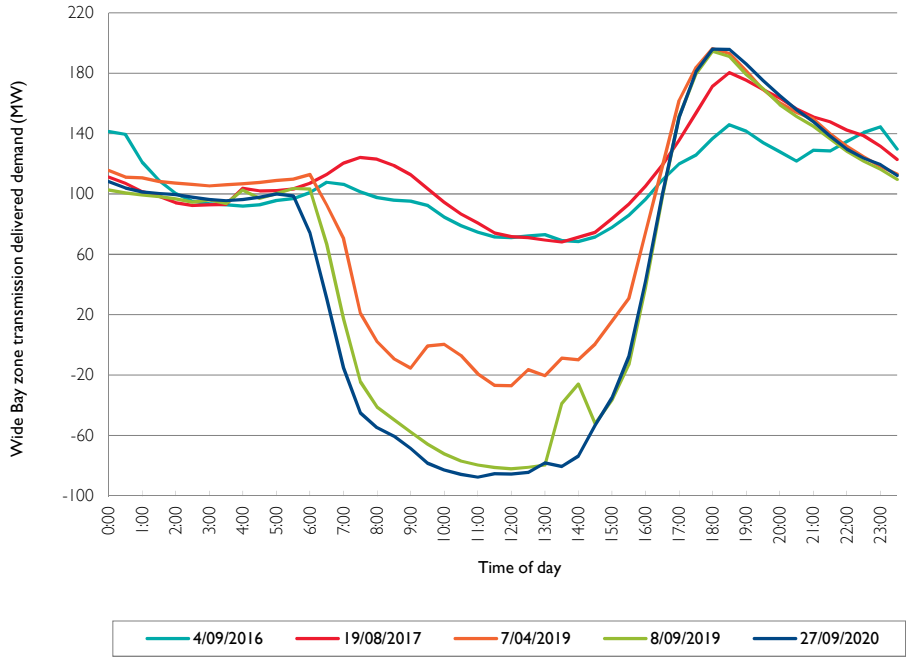

There are currently no double circuits in the Wide Bay zone in AEMO's lightning vulnerable transmission line list.


8.7.7 Surat zone

The Surat zone experienced no load loss for a single network element outage during 2020/21.

The Surat zone includes the scheduled embedded Roma and direct connected embedded Condamine generators and significant non-scheduled embedded generator Baking Board Solar Farm as defined in Figure 3.5. These embedded generators provided approximately 210GWh during 2020/21.

Figure 8.34 provides historical transmission delivered load duration curves for the Surat zone. Energy delivered from the transmission network has increased by approximately 4.3% between 2019/20 and 2020/21. The peak transmission delivered demand in the zone was 706MW, which is the highest maximum demand over the last five years. The CSG load in the zone has now reached expected demand levels. The minimum transmission delivered demand in the zone was 189MW, which is the lowest demand over the last five years as a result of load disconnection following the Callide C unit 4 incident on 25 May 2021.

Figure 8.34 Historical Surat zone transmission delivered load duration curves

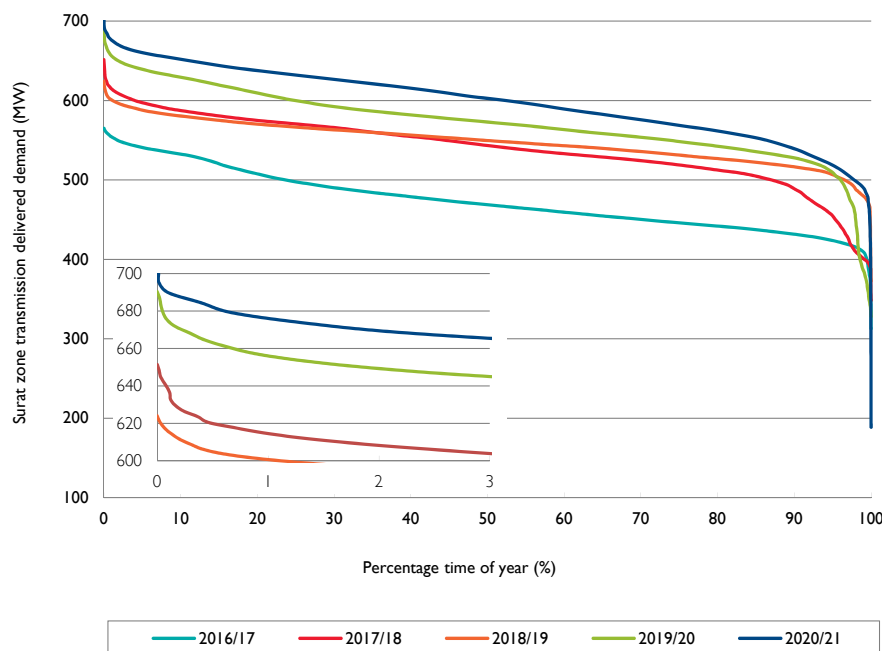

As a result of double circuit outages associated with lightning strikes, AEMO includes the following double circuits in the Surat zone in the vulnerable list:

- Tarong to Chinchilla 132kV double circuit transmission line, last tripped October 2020
- Condabri North to Condabri Central 132kV double circuit transmission line, last tripped January 2020.

8.7.8 Bulli zone


The Bulli zone experienced no load loss for a single network element outage during 2020/21.

The Bulli zone contains no scheduled, semi-scheduled or significant non-scheduled embedded generators as defined in Figure 3.5.

Figure 8.35 provides historical transmission delivered load duration curves for the Bulli zone. Energy delivered from the transmission network has reduced by approximately 5.6% between 2019/20 and 2020/21. The peak transmission delivered demand in the zone was 196MW which is below the highest maximum demand over the last five years of 210MW set in 2019/20. The CSG load in the zone has now reached expected demand levels. The minimum transmission delivered demand in the zone was 23MW, which is the lowest demand over the last five years as a result of a load disconnection event.

8 Network capability and performance

Figure 8.35 Historical Bulli zone transmission delivered load duration curves

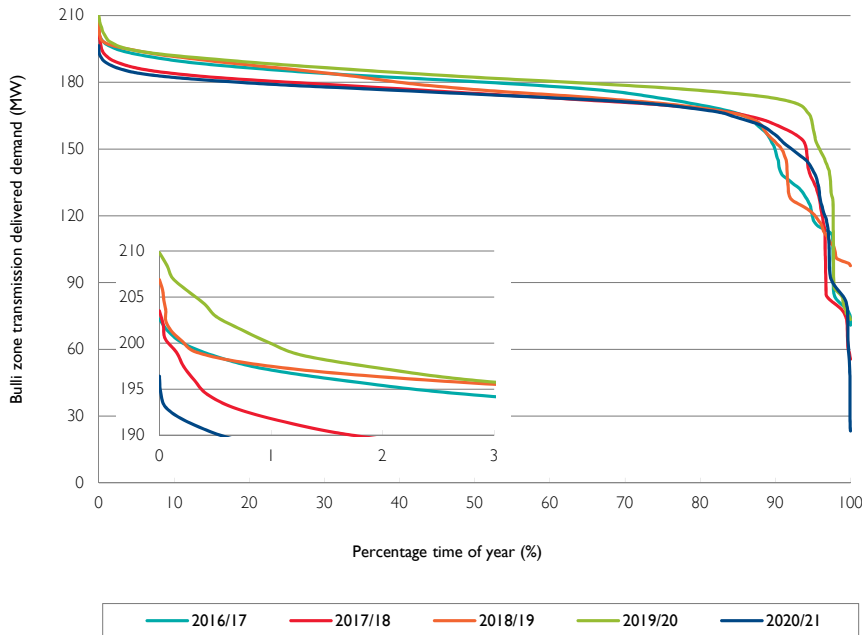

There are currently no double circuits in the Bulli zone in AEMO's lightning vulnerable transmission line list.

8.7.9 South West zone


The South West zone experienced no load loss for a single network element outage during 2020/21.

The South West zone includes the semi-scheduled embedded generators Oakey 1 Solar Farm, Oakey 2 Solar Farm, Yarranlea Solar Farm, Maryrorough Solar Farm, Warwick Solar Farm and significant non-scheduled embedded generator Daandine Power Station as defined in Figure 3.5. These embedded generators provided approximately 483GWh during 2019/20.

Figure 8.36 provides historical transmission delivered load duration curves for the South West zone. The South West zone is one of two zones in Queensland where the delivered demand reaches negative values, meaning that the embedded generation exceeds the native load, the transmission network supplying the zone is often operated at zero and near zero loading, and the embedded generation makes use of the transmission network to supply loads in other zones.

Energy delivered from the transmission network has reduced by 12.9% between 2019/20 and 2020/21, to the lowest level in the last decade. The reduction in energy delivered is due to the increase in energy from embedded generation. The peak transmission delivered demand in the zone was 326MW, which is below the highest maximum demand over the past five years of 343MW set in 2017/18. The minimum transmission delivered demand in the zone was -117MW, which is the lowest demand on record.

Figure 8.36 Historical South West zone transmission delivered load duration curves

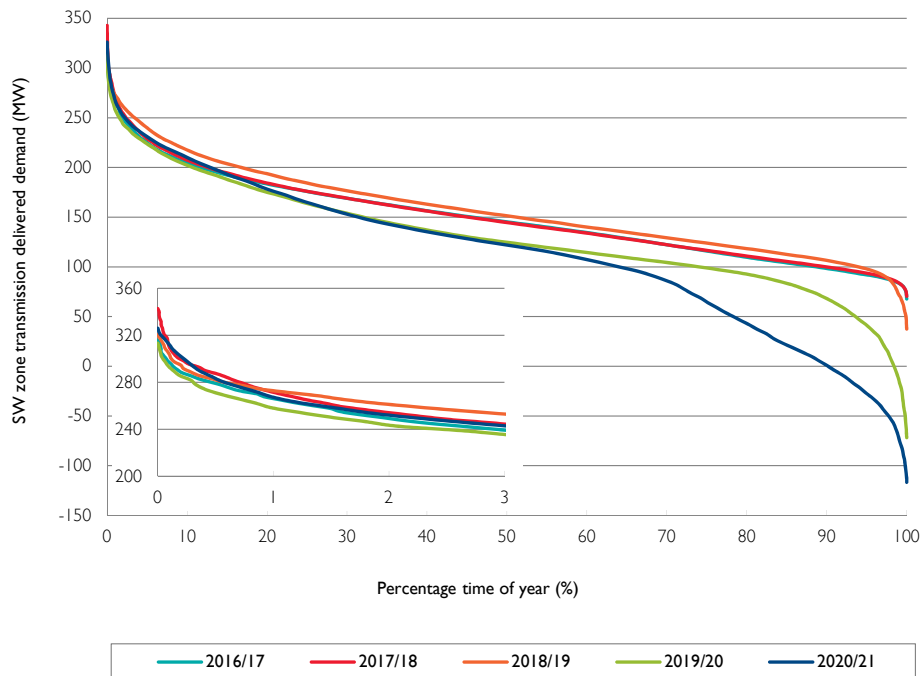

Energy Infrastructure Investments (EII) has advised AEMO of its intention to retire Daandine Power Station in June 2022.

There are currently no double circuits in the South West zone in AEMO's lightning vulnerable transmission line list.

8.7.10 Moreton zone


The Moreton zone experienced no load loss for a single network element outage during 2020/21.

The Moreton zone includes the significant non-scheduled embedded generators Sunshine Coast Solar Farm, Bromelton and Rocky Point as defined in Figure 3.5. These embedded generators provided approximately 65GWh during 2020/21.

Figure 8.37 provides historical transmission delivered load duration curves for the Moreton zone. Energy delivered from the transmission network has reduced by 1.8% between 2019/20 and 2020/21, to the lowest level in the last decade. The peak transmission delivered demand in the zone was 3,899MW, which is below the highest maximum demand over the past five years of 4,316MW set in 2018/19. The minimum transmission delivered demand in the zone was 570MW which is the lowest demand on record.

8 Network capability and performance

Figure 8.37 Historical Moreton zone transmission delivered load duration curves

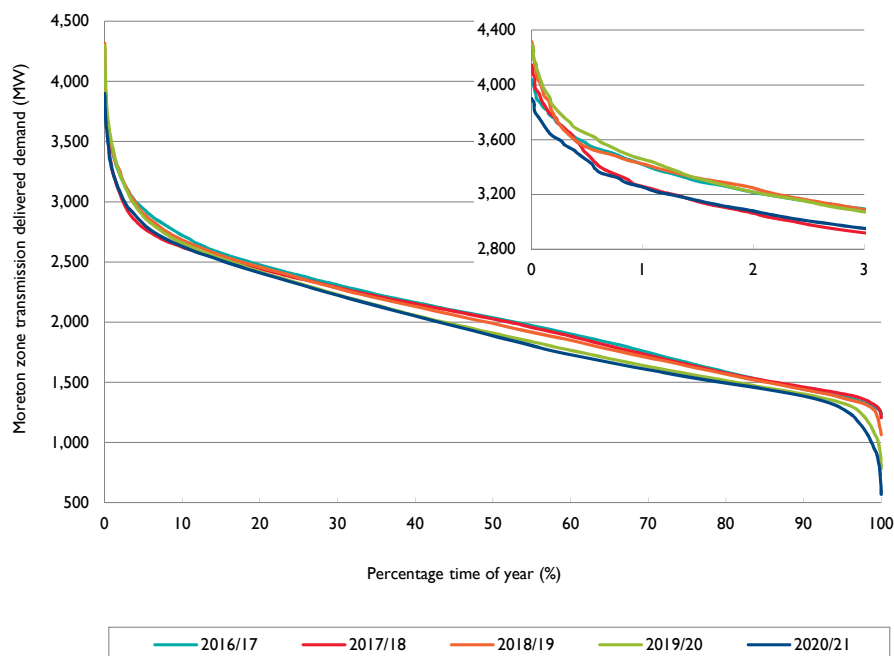

High voltages associated with these light load conditions are currently managed with existing reactive sources. However, voltage control within Powerlink's and Energex's network is forecast to become increasingly challenging for longer durations. This is discussed in Section 6.7.10.

There are currently no double circuits in the Moreton zone in AEMO's lightning vulnerable transmission line list.


8.7.11 Gold Coast zone

The Gold Coast zone experienced no load loss for a single network element outage during 2020/21.

The Gold Coast zone contains no scheduled, semi-scheduled or significant non-scheduled embedded generators as defined in Figure 3.5.

Figure 8.38 provides historical transmission delivered load duration curves for the Gold Coast zone. Energy delivered from the transmission network has reduced by 0.9% between 2019/20 and 2020/21, to the lowest level in the last decade. The peak transmission delivered demand in the zone was 675MW, which is below the highest maximum demand over the last five years of 732MW set in 2018/19. The minimum transmission delivered demand in the zone was 167MW which equals the lowest demand on record set in 2019/2020.

Figure 8.38 Historical Gold Coast zone transmission delivered load duration curves

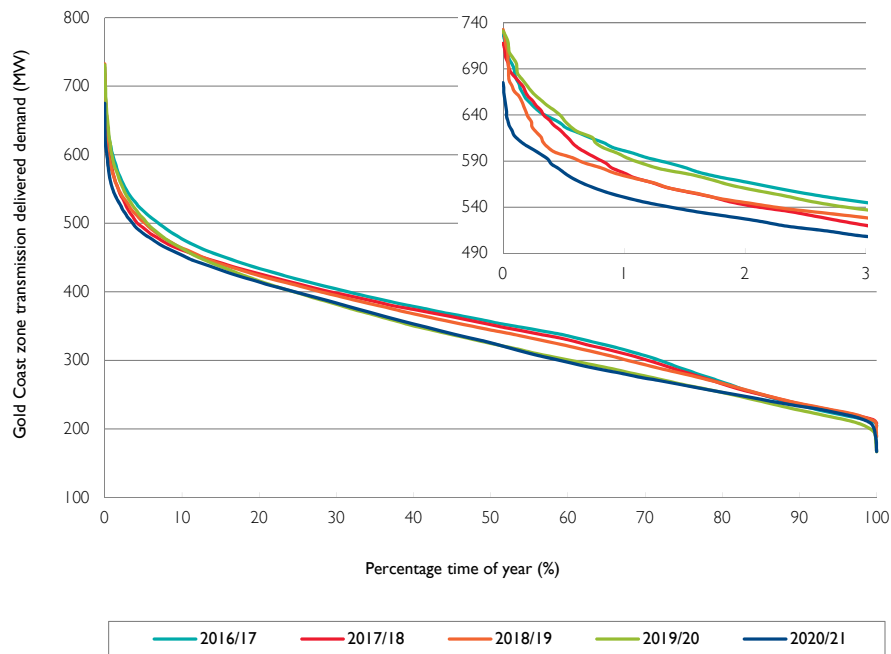

There are currently no double circuits in the Gold Coast zone in AEMO's lightning vulnerable transmission line list.

8 Network capability and performance
