



IUSA – Customer Generating Facility – Typical Direct on Fibre Protection Signalling Interface for a Feeder (DCA)

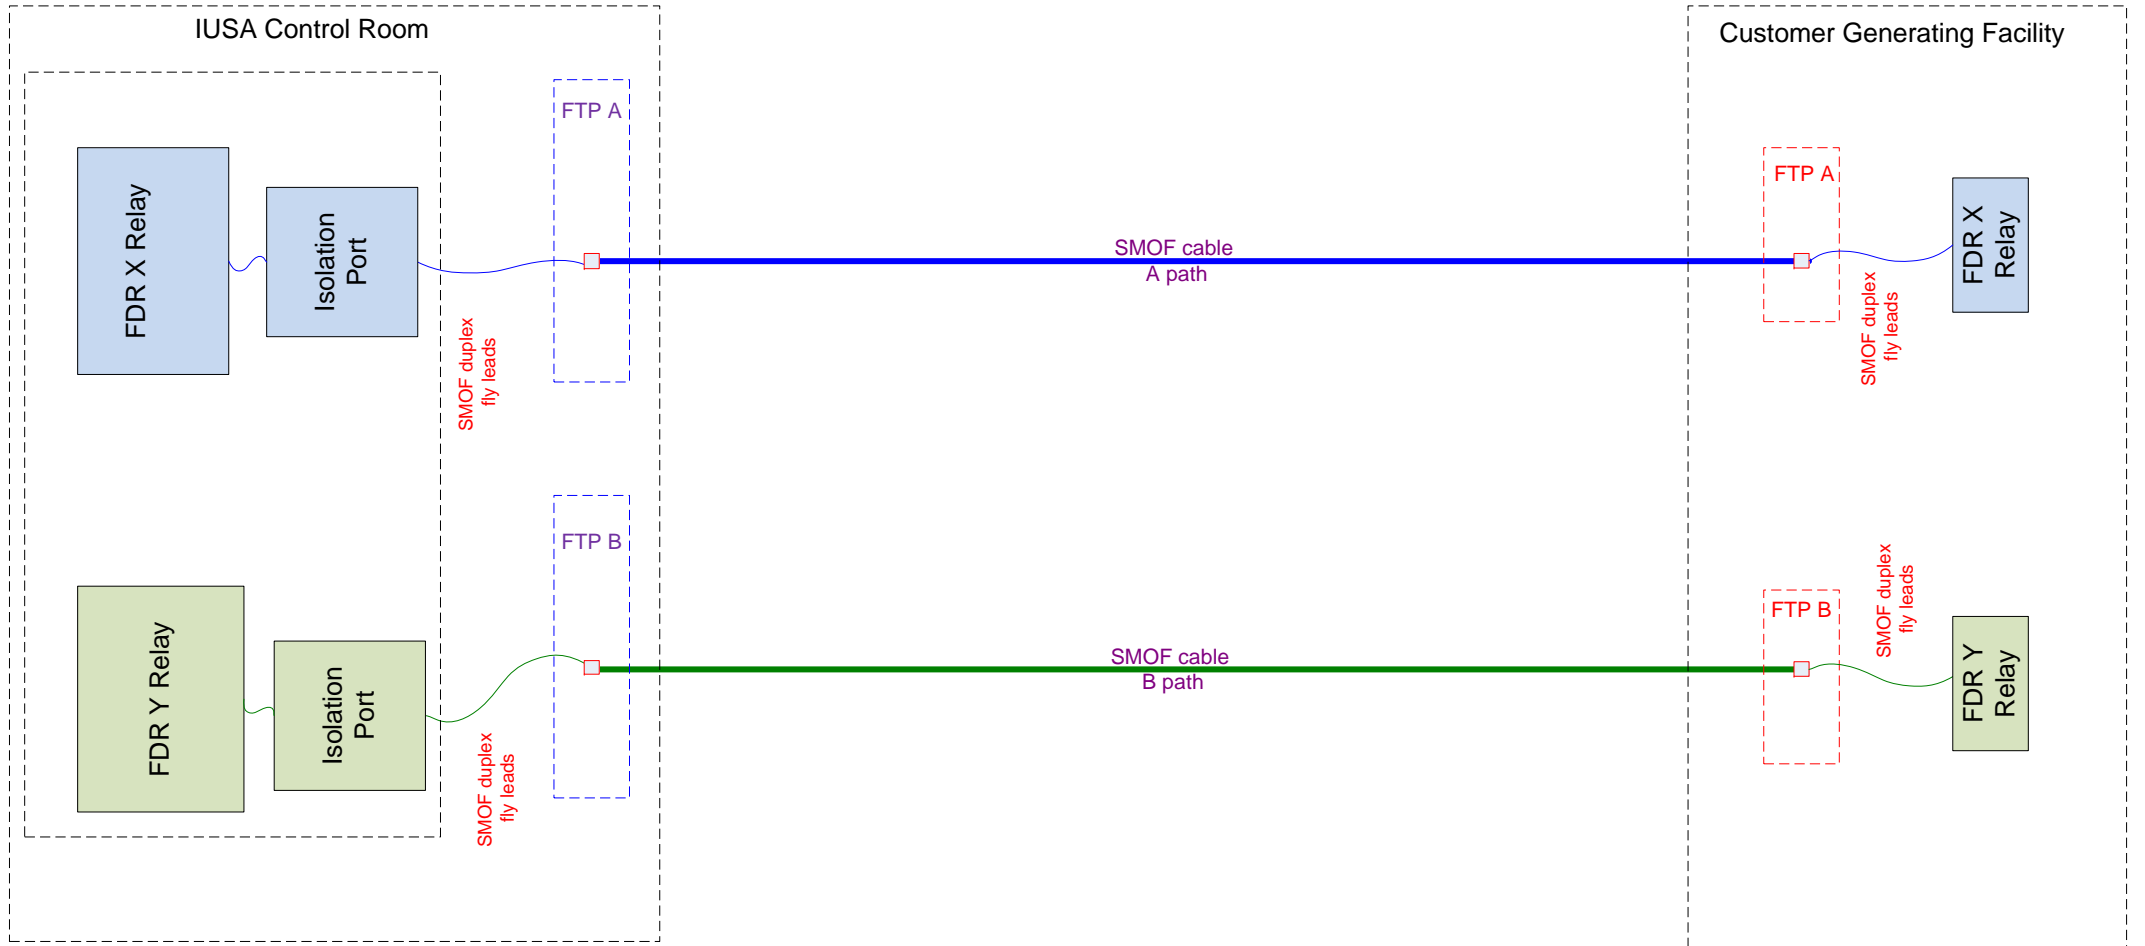


SMOF Cable A path: 48 Core 1310nm, 9 Micron Single Mode Optical Fibre Cable
SMOF Cable B path: 48 Core 1310nm, 9 Micron Single Mode Optical Fibre Cable

IUSA – Customer Generating Facility - Typical Control Signal Interface

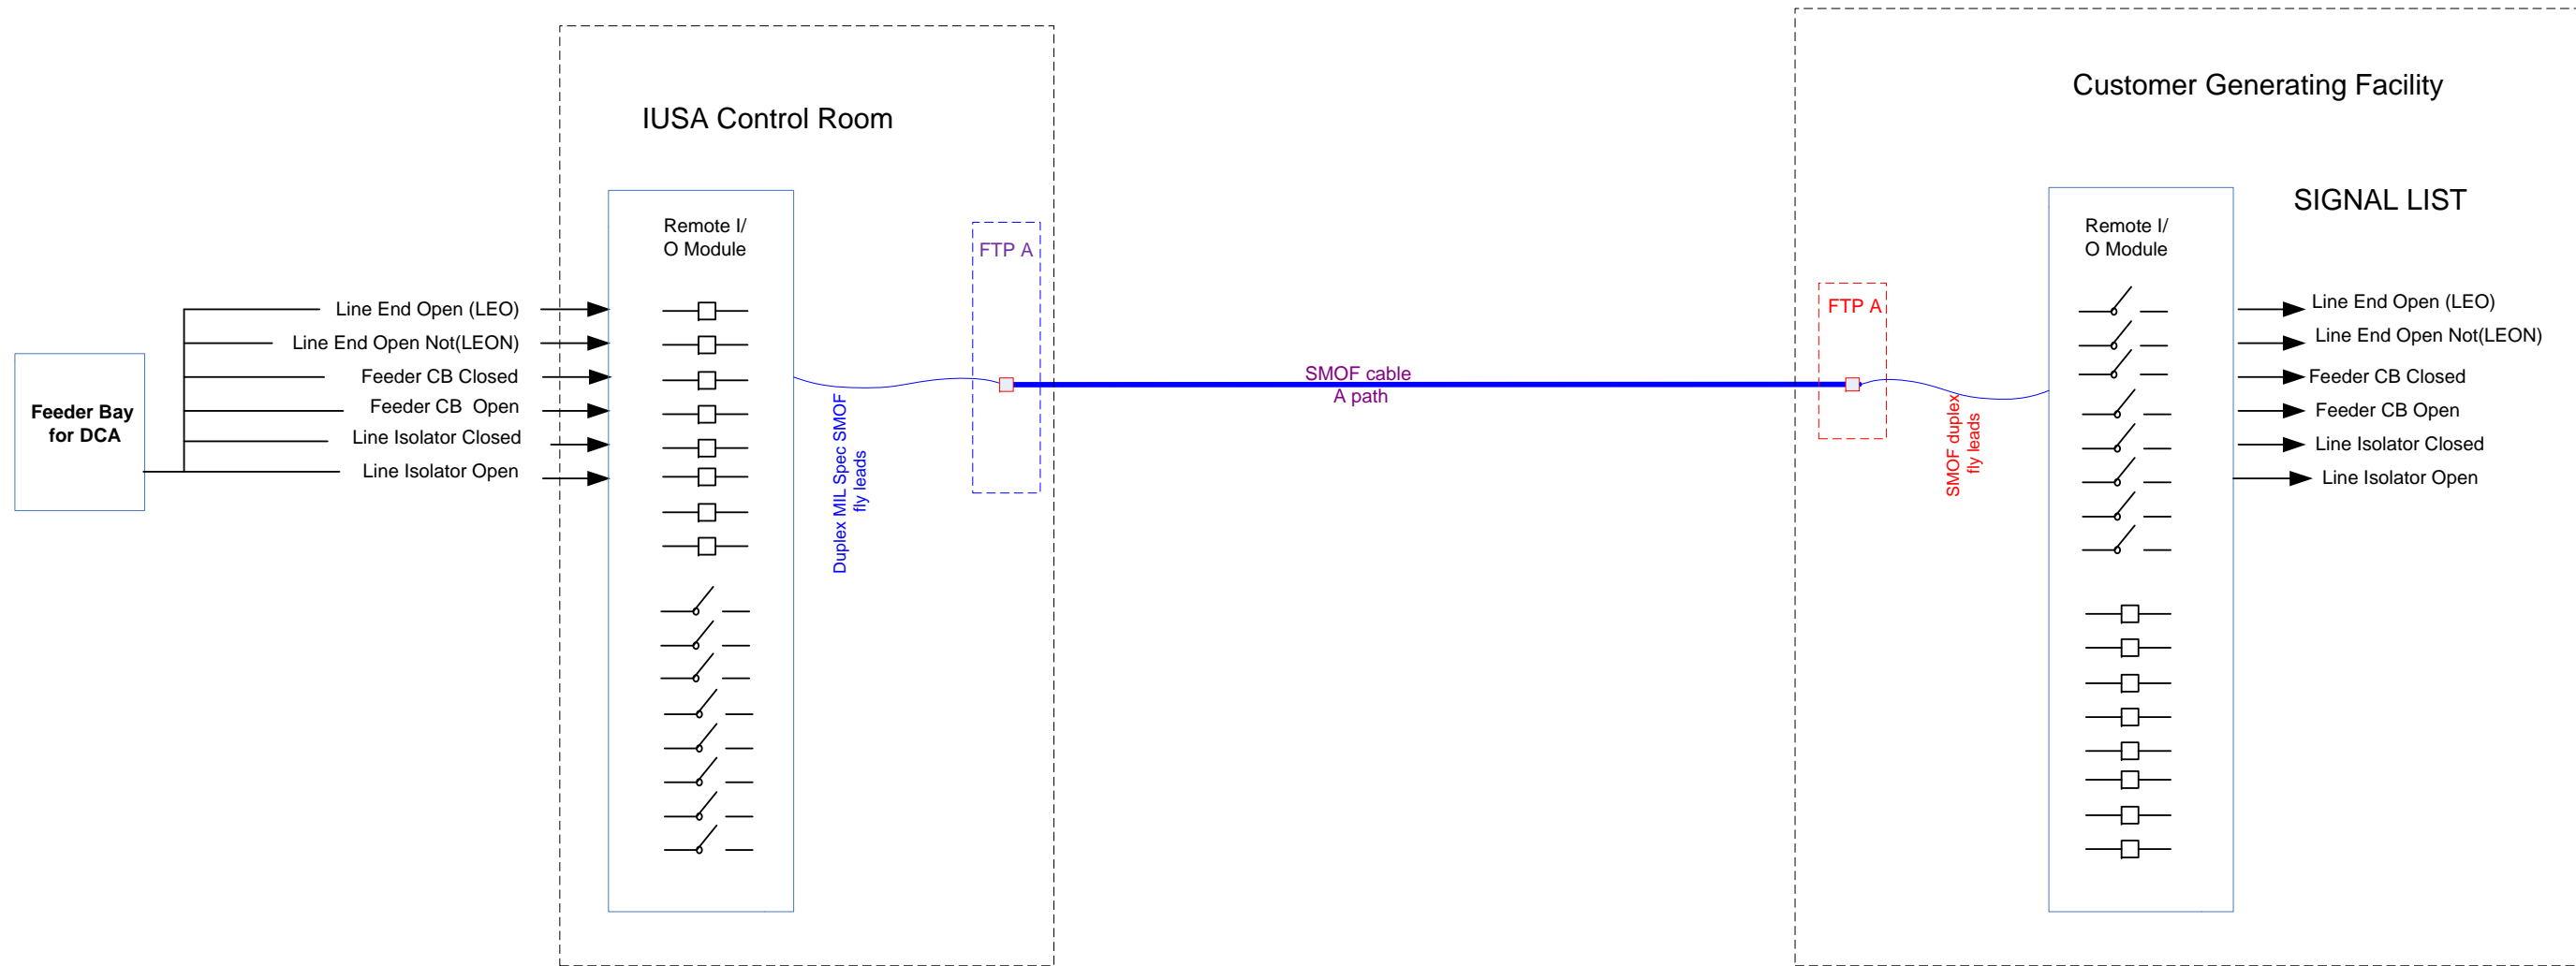

IUSA – Customer Generating Facility - Typical EMS SCADA Interface - Physical requirements

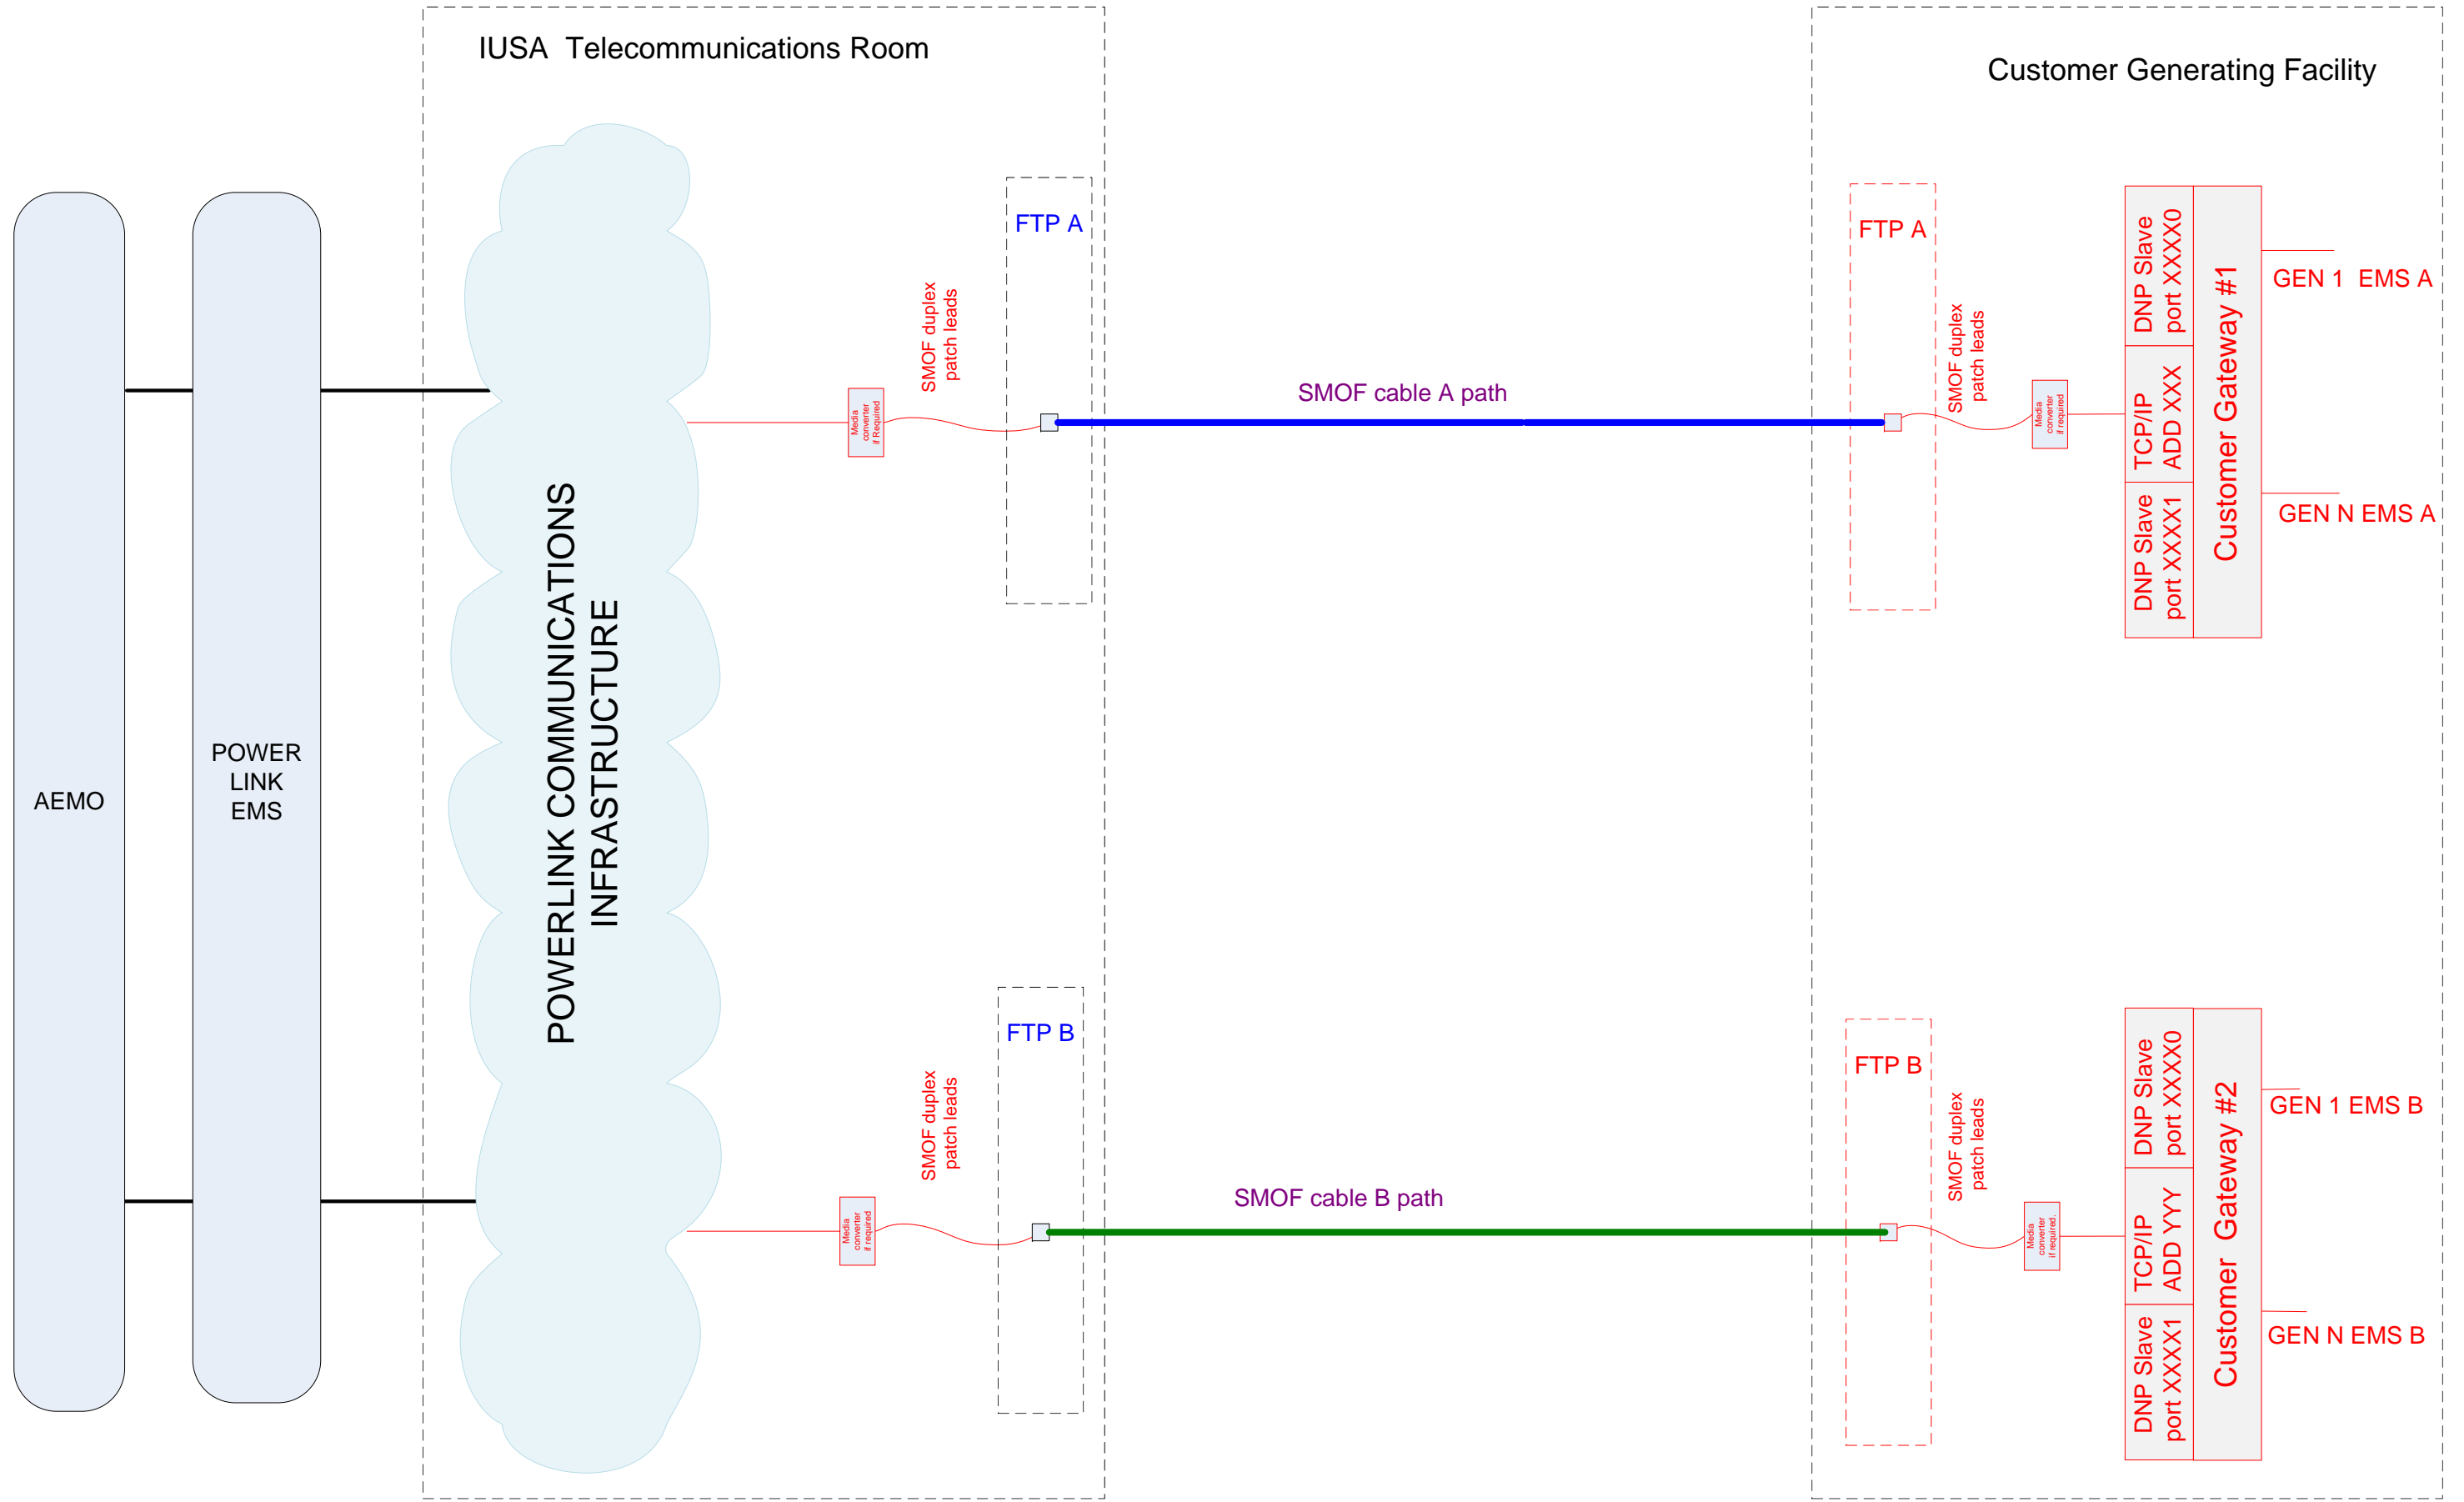

IUSA – Customer Generating Facility – Typical Telephone Connection Interface

