



# Typical Direct on Fibre Protection Signalling Interface for a Feeder

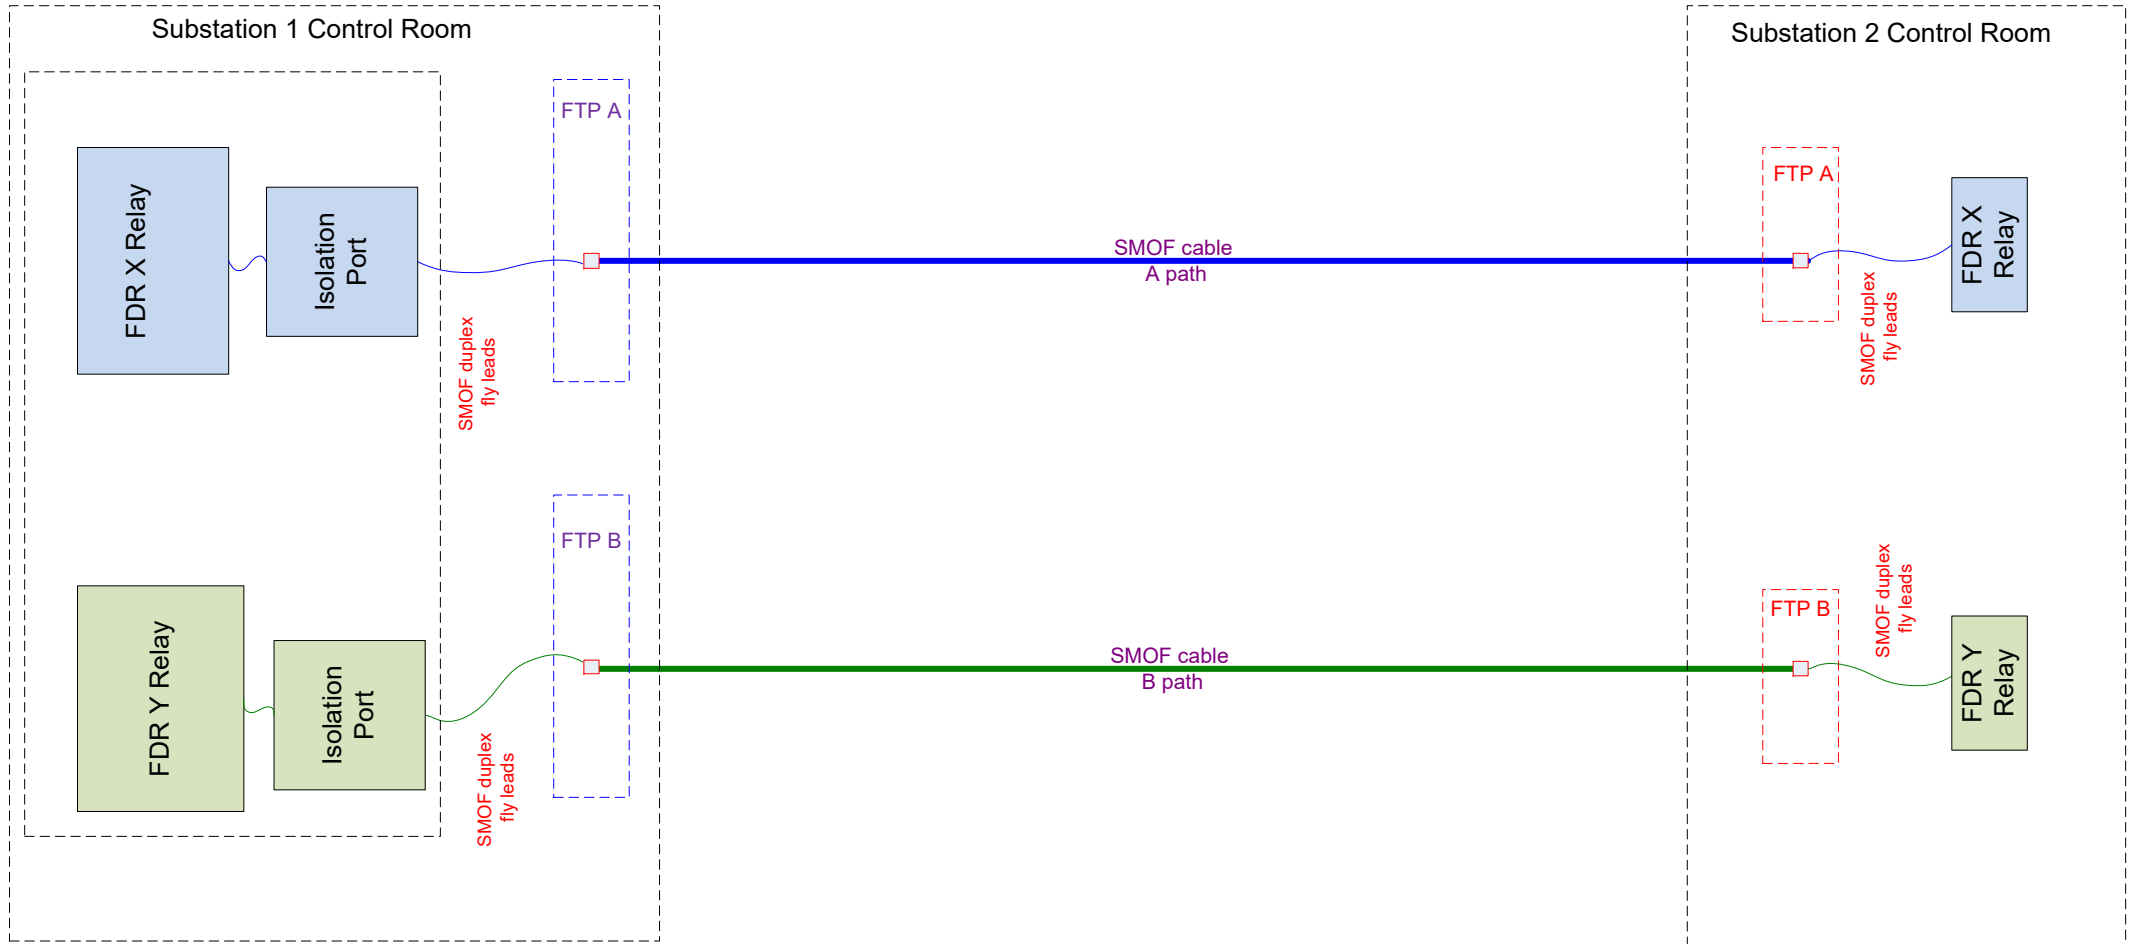

**SMOF Cable A path:** 48 Core 1310nm, 9 Micron Single Mode Optical Fibre Cable  
**SMOF Cable B path:** 48 Core 1310nm, 9 Micron Single Mode Optical Fibre Cable

# IUSA/DNA - Customer Generating Facility - Typical EMS SCADA Interface - Physical requirements

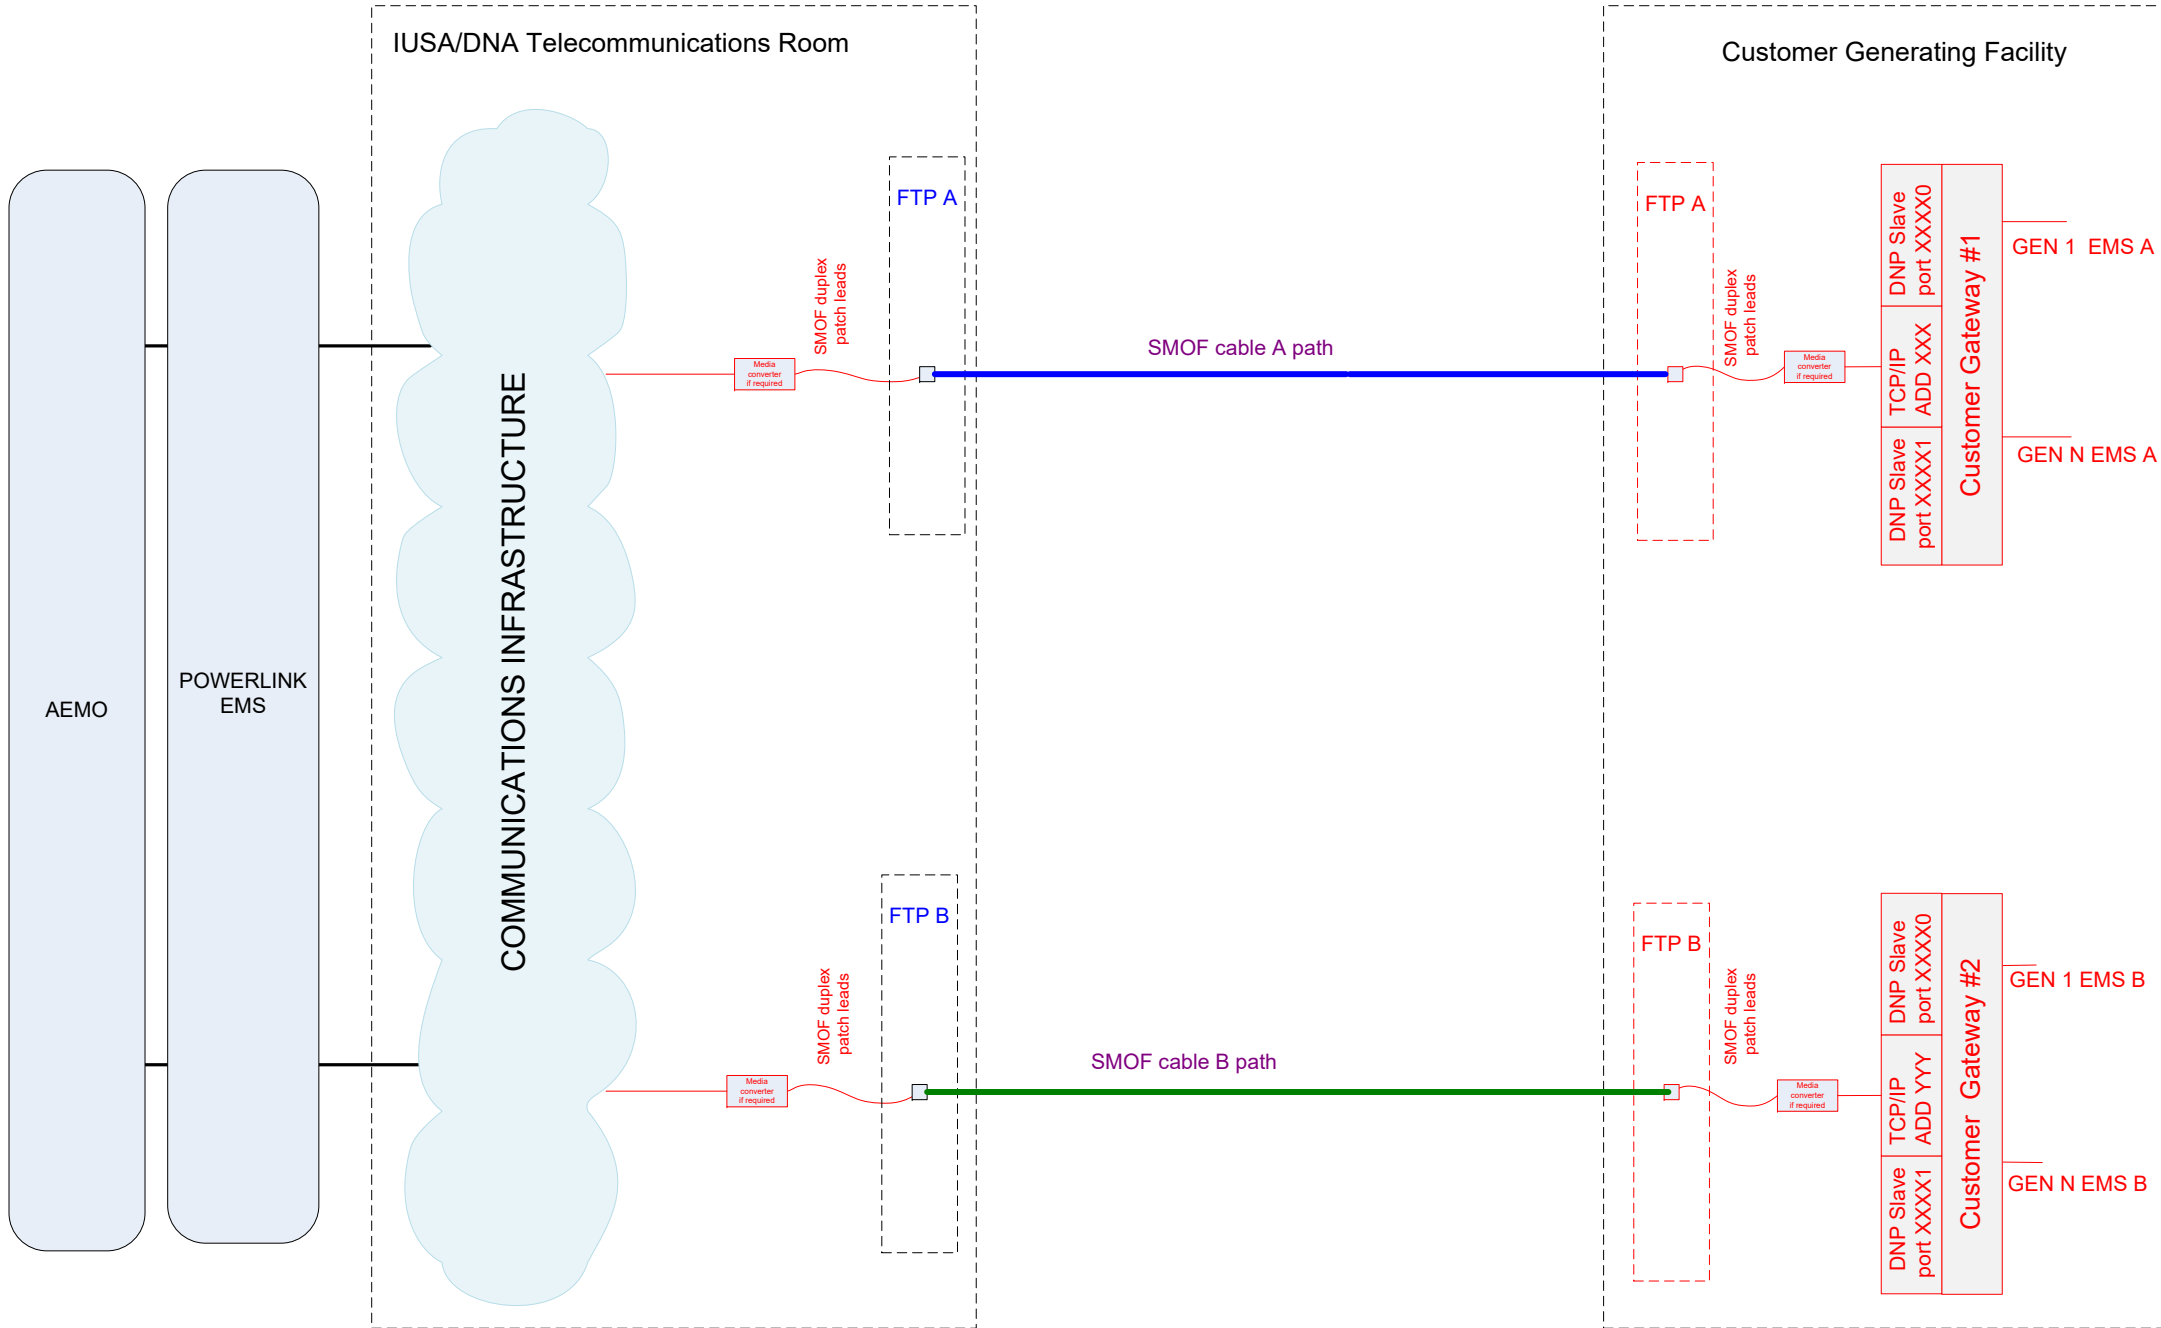

IUSA/DNA – Customer Generating Facility – Typical Telephone Connection Interface

